

Inserti filettati RIVSERT zigrinati ciechi

Closed end RIVSERT knurled rivet nuts

SFRC-Z



■ Acciaio zincato


Zinc-plated steel

Fusto cilindrico zigrinato cieco

Closed end knurled cylindrical shank

Testa ridotta

Reduced head

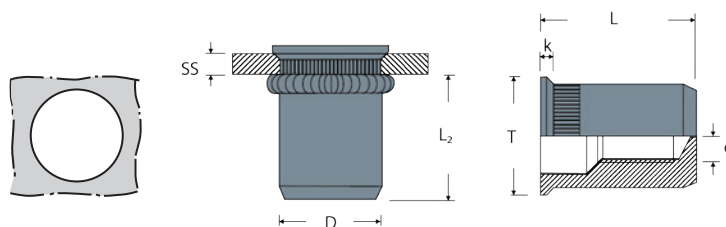

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M3	5,0	4,9	6,0	0,5	0,5 ÷ 2,0	13,5	9,5 ÷ 10,0	1664300	1000	20000
M4	6,0	5,9	7,0	0,5	0,5 ÷ 2,0	15,0	10,5 ÷ 11,5	1664500	1000	10000
M4	6,0	5,9	7,0	0,5	2,0 ÷ 4,0	16,5	10,5 ÷ 11,5	1664600	1000	10000
M5	7,0	6,9	8,0	0,6	0,5 ÷ 2,0	16,5	12,0 ÷ 13,0	1529800	500	7000
M5	7,0	6,9	8,0	0,6	2,0 ÷ 4,0	18,0	12,0 ÷ 13,0	1571500	500	7000
M6	9,0	8,9	10,0	0,6	0,5 ÷ 3,0	20,5	15,0 ÷ 16,0	3309600	250	3000
M6	9,0	8,9	10,0	0,6	2,5 ÷ 5,5	24,0	15,0 ÷ 16,0	1664700	250	3000
M8	11,0	10,9	12,0	0,65	0,5 ÷ 3,0	23,0	17,0 ÷ 18,0	1664800	250	2000
M8	11,0	10,9	12,0	0,65	3,0 ÷ 6,0	26,5	17,0 ÷ 18,0	1664900	200	2000
M10	13,0	12,9	14,0	0,8	1,0 ÷ 3,5	24,5	18,0 ÷ 19,0	1665000	100	1000

Carico di prova assiale del filetto
Axial proof load for thread



Coppia di serraggio
Clamping torque



d			N	Nm
mm	mm	mm		
M3	5.0		3900	1.0
M4	6.0		6800	4.0
M5	7.0		11500	8.0
M6	9.0		16500	15.0
M8	11.0		25000	26.0
M10	13.0		32000	45.0

Inserti filettati RIVSERT zigrinati ciechi

Closed end RIVSERT knurled rivet nuts

SFSC-Z



■ Acciaio zincato


Zinc-plated steel

Fusto cilindrico zigrinato cieco

Closed end knurled cylindrical shank

Testa svasata

Countersunk head

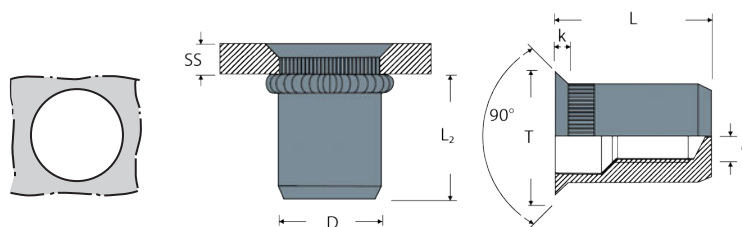

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M4	6,0	5,9	9,0	1,5	1,5 ÷ 3,5	17,0	9,0 ÷ 10,0	1899400	1000	8000
M5	7,0	6,9	10,0	1,5	1,5 ÷ 4,0	20,0	13,0 ÷ 14,0	1688300	500	6000
M6	9,0	8,9	12,0	1,5	1,5 ÷ 4,5	23,5	16,0 ÷ 17,0	2992100	250	3000
M8	11,0	10,9	14,0	1,5	1,5 ÷ 4,0	26,5	18,0 ÷ 19,0	1920400	200	2000
M10	13,0	12,9	16,0	1,5	1,5 ÷ 5,0	30,0	24,0 ÷ 25,0	3254300	100	1000

Carico di prova assiale del filetto
Axial proof load for thread



Coppia di serraggio
Clamping torque



d			N	Nm
mm	mm	mm		
M4	6.0		6800	3.0
M5	7.0		11500	6.0
M6	9.0		16500	11.0
M8	11.0		25000	20.0
M10	13.0		32000	32.0

Inserti filettati RIVSERT

RIVSERT rivet nuts

FTEP



■ Acciaio zincato


Zinc-plated steel

Fusto semiesagonale aperto

Open semi-hexagonal shank

Testa tonda

Dome head

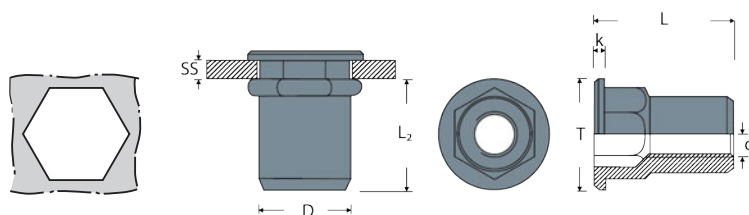

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M3	5,0	4,9	6,2	0,6	0,5 ÷ 1,5	9,0	5,0 ÷ 5,5	4793200	1000	10000
M4	6,0	5,9	9,0	0,8	0,5 ÷ 2,0	11,0	5,5 ÷ 6,5	3114600	1000	10000
M4	6,0	5,9	9,0	0,8	2,0 ÷ 4,0	12,5	5,5 ÷ 6,5	4836800	1000	10000
M5	7,0	6,9	10,0	1,0	0,5 ÷ 2,5	13,0	7,0 ÷ 8,0	2413900	500	8000
M6	9,0	8,9	12,7	1,35	0,5 ÷ 3,0	15,0	7,5 ÷ 8,5	2414000	250	4000
M8	11,0	10,9	16,0	1,5	1,0 ÷ 3,5	18,0	10,0 ÷ 11,0	2414100	250	2000
M8	11,0	10,9	16,0	1,5	6,0 ÷ 9,0	23,0	10,0 ÷ 11,0	4384800	200	2000
M10	13,0	12,9	18,0	1,7	1,0 ÷ 3,5	21,0	11,5 ÷ 12,5	3109700	100	1000
M12	15,0	14,9	20,0	1,7	1,0 ÷ 4,0	23,0	15,5 ÷ 17,0	1899000	50	600

Carico di prova assiale del filetto
Axial proof load for thread



Coppia di serraggio
Clamping torque



d			N	Nm
mm	mm	mm		
M3	5.0		3900	2.0
M4	6.0		6800	5.0
M5	7.0		11500	8.5
M6	9.0		16500	15.0
M8	11.0		25000	26.0
M10	13.0		32000	50.0
M12	16.0		34000	80.0

Inserti filettati RIVSERT

RIVSERT rivet nuts

FREP



■ Acciaio zincato


Zinc-plated steel

Fusto semiesagonale aperto

Open semi-hexagonal shank

Testa ridotta

Reduced head

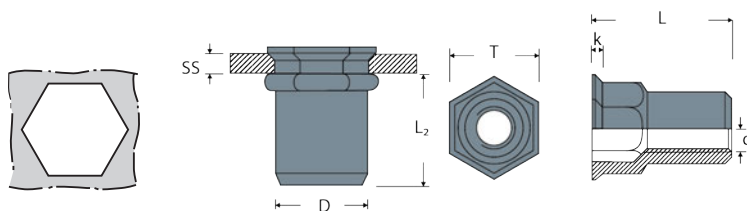

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M3	5,0	4,9	6,0	0,5	0,5 ÷ 1,5	9,0	5,0 ÷ 5,5	4074200	1000	20000
M3	5,0	4,9	6,0	0,5	1,5 ÷ 2,5	10,5	5,0 ÷ 5,5	3383900	1000	20000
M4	6,0	5,9	7,0	0,5	0,5 ÷ 2,0	12,0	6,5 ÷ 7,5	2868400	1000	14000
M5	7,0	6,9	8,0	0,5	0,5 ÷ 2,5	13,0	7,0 ÷ 8,0	1673100	1000	8000
M5	7,0	6,9	8,0	0,5	2,5 ÷ 4,5	15,0	7,0 ÷ 8,0	3751400	500	8000
M6	9,0	8,9	10,0	0,6	1,0 ÷ 3,5	16,0	8,5 ÷ 9,5	0867500	500	4000
M6	9,0	8,9	10,0	0,6	3,0 ÷ 5,5	18,0	8,5 ÷ 9,5	3036800	250	4000
M8	11,0	10,9	12,0	0,65	1,0 ÷ 3,5	17,5	9,5 ÷ 10,5	2413800	250	2500
M10	13,0	12,9	14,5	0,7	1,0 ÷ 3,5	21,0	12,0 ÷ 13,0	3094700	100	1500
M12	16,0	15,9	17,5	0,8	1,0 ÷ 4,0	23,2	16,0 ÷ 18,0	3590500	100	1000
M12	16,0	15,9	17,0	1,0	3,5 ÷ 7,5	27,5	16,0 ÷ 18,0	4356900	100	800

Carico di prova assiale del filetto
Axial proof load for thread



Coppia di serraggio
Clamping torque



d			N	Nm
mm	mm	mm		
M3	5.0		3900	1.0
M4	6.0		6800	4.0
M5	7.0		11500	8.0
M6	9.0		16500	15.0
M8	11.0		25000	26.0
M10	13.0		32000	45.0
M12	16.0		34000	70.0

Inserti filettati RIVSERT - foro in pollici

RIVSERT rivet nuts - inch hole

FREP-P



■ Acciaio zincato


Zinc-plated steel

Fusto semiesagonale aperto - esagono in pollici

Open semi-hexagonal shank - hexagon in inches

Testa ridotta

Reduced head

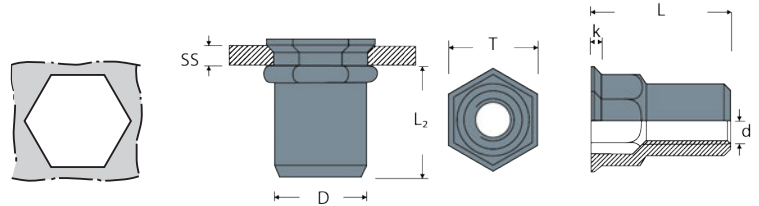

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M4	6,4	6,3	7,2	0,5	0,5 ÷ 2,0	10,0	6.5 ÷ 6.8	0298800	500	14000
M5	7,3	7,2	8,1	0,5	0,5 ÷ 2,5	12,0	6.5 ÷ 6.7	0298900	500	8000
M6	9,7	9,6	10,5	0,6	0,5 ÷ 3,0	15,0	9.4 ÷ 9.8	0299000	500	4000
M8	10,7	10,6	11,5	0,6	1,0 ÷ 3,5	16,0	9.5 ÷ 10.0	0299100	250	2500

Carico di prova assiale del filetto
Axial proof load for thread



Coppia di serraggio
Clamping torque



d			N	Nm
mm	mm	mm		
M4	6.4		6800	4.0
M5	7.3		11500	8.0
M6	9.7		16500	15.0
M8	10.7		25000	26.0

Inserti filettati RIVSERT

RIVSERT rivet nuts

FTE

■ Acciaio zincato


Zinc-plated steel

Fusto esagonale aperto

Open hexagonal shank

Testa tonda

Dome head

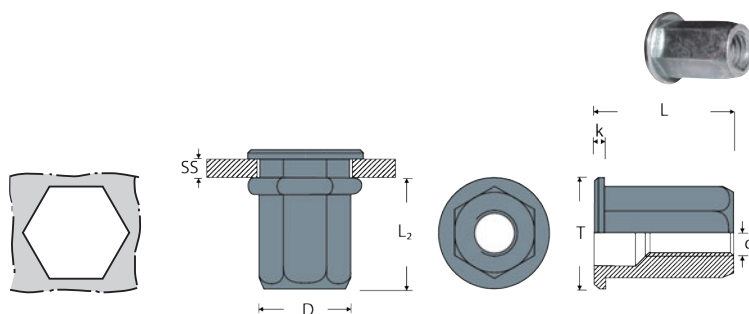

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M3	5,0	4,9	7,0	0,8	0,5 ÷ 2,0	8,8	5,0 ÷ 5,5	5947800	1000	10000
M4	6,0	5,9	9,0	0,8	0,5 ÷ 2,0	11,0	5,5 ÷ 6,5	0310700	1000	10000
M4	6,0	5,9	9,0	0,8	2,0 ÷ 4,0	13,5	5,5 ÷ 6,5	1773800	1000	10000
M5	7,0	6,9	10,0	1,0	0,5 ÷ 2,5	14,0	7,0 ÷ 8,0	0310800	500	7000
M5	7,0	6,9	10,0	1,0	3,0 ÷ 5,5	16,5	7,0 ÷ 8,0	1774000	500	6000
M6	9,0	8,9	13,0	1,35	0,5 ÷ 3,0	15,25	8,5 ÷ 9,5	0310900	250	4000
M6	9,0	8,9	13,0	1,35	3,0 ÷ 5,5	19,5	8,5 ÷ 9,5	1774100	250	3000
M8	11,0	10,9	16,0	1,5	1,0 ÷ 3,5	18,0	10,5 ÷ 12,5	0311000	200	2000
M8	11,0	10,9	16,0	1,5	3,0 ÷ 5,5	20,75	10,5 ÷ 12,5	1774300	100	2000
M10	12,0	11,9	18,0	1,7	1,0 ÷ 3,5	21,0	12,5 ÷ 13,5	2970900	100	1500
M10	13,0	12,9	19,0	2,0	1,0 ÷ 4,0	21,0	12,5 ÷ 14,5	0311100	100	1000
M10	13,0	12,9	19,0	2,0	3,8 ÷ 7,8	25,0	12,5 ÷ 14,5	1774400	100	1000
M12	15,0	14,9	20,0	1,7	1,0 ÷ 4,0	23,0	12,5 ÷ 14,5	5414400	50	1000
M12	16,0	15,9	23,0	2,0	2,0 ÷ 5,0	27,0	15,0 ÷ 16,0	4091200	50	500

Carico di prova assiale del filetto
Axial proof load for thread



Coppia di serraggio
Clamping torque



d			N	Nm
mm	mm	mm		
M3	5.0		3900	2.0
M4	6.0		6800	5.0
M5	7.0		11500	8.5
M6	9.0		16500	15.0
M8	11.0		25000	26.0
M10	12.0		32000	50.0
M10	13.0		32000	50.0
M12	15.0		34000	80.0
M12	16.0		34000	80.0

Inserti filettati RIVSERT

RIVSERT rivet nuts

FRE



■ Acciaio zincato


Zinc-plated steel

Fusto esagonale aperto

Open hexagonal shank

Testa ridotta

Reduced head

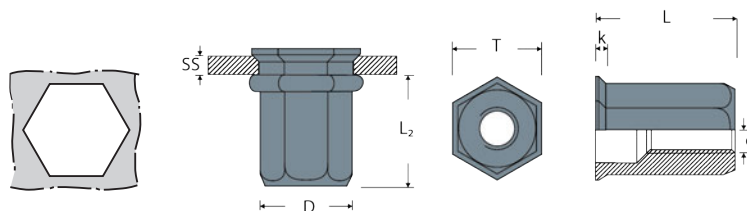

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M3	5,0	4,9	5,8	0,5	0,5 ÷ 2,0	8,5	5,5 ÷ 6,5	4879700	1000	20000
M3	5,0	4,9	5,8	0,5	1,5 ÷ 2,5	9,5	5,5 ÷ 6,5	6219000	1000	-
M4	6,0	5,9	7,0	0,5	0,5 ÷ 2,5	11,0	6,0 ÷ 7,0	0311300	1000	14000
M4	6,0	5,9	7,0	0,5	2,5 ÷ 5,0	13,5	6,0 ÷ 7,0	1769100	1000	10000
M5	7,0	6,9	8,0	0,5	0,5 ÷ 2,5	12,5	6,0 ÷ 7,0	1769200	500	-
M5	7,0	6,9	8,0	0,5	0,5 ÷ 3,0	14,5	7,5 ÷ 9,0	0311400	500	8000
M5	7,0	6,9	8,0	0,5	3,0 ÷ 5,0	16,0	7,5 ÷ 9,0	1769300	500	8000
M6	9,0	8,9	10,0	0,6	0,5 ÷ 3,5	16,0	9,5 ÷ 10,5	0311500	500	4000
M6	9,0	8,9	10,0	0,6	3,5 ÷ 6,0	18,0	9,5 ÷ 10,5	1769400	250	4000
M8	11,0	10,9	12,0	0,65	1,0 ÷ 4,0	18,0	11,0 ÷ 12,0	0311600	250	2500
M8	11,0	10,9	12,0	0,65	4,0 ÷ 6,0	20,0	11,0 ÷ 12,0	1769600	200	2000
M10	12,0	11,9	13,1	0,75	0,5 ÷ 3,5	19,0	14,5 ÷ 16,5	4484600	200	1500
M10	13,0	12,9	14,5	0,75	1,0 ÷ 3,5	19,0	14,5 ÷ 16,5	1769700	100	1500
M10	13,0	12,9	14,5	0,75	3,5 ÷ 6,0	23,5	14,5 ÷ 16,5	1769800	100	1000
M12	15,0	14,9	17,0	1,0	1,0 ÷ 4,0	22,5	14,5 ÷ 16,5	5864600	100	-
M12	16,0	15,9	18,0	1,0	2,0 ÷ 5,0	25,0	17,0 ÷ 18,5	4280000	50	800
M12	16,0	15,9	18,0	1,0	5,0 ÷ 7,5	28,0	17,0 ÷ 18,5	5437200	50	800

Carico di prova assiale del filetto
Axial proof load for thread



Coppia di serraggio
Clamping torque



d			N	Nm
mm	mm	mm		
M3	5.0		3900	2.0
M4	6.0		6800	5.0
M5	7.0		11500	8.0
M6	9.0		16500	15.0
M8	11.0		25000	26.0
M10	12.0		32000	45.0
M10	13.0		32000	45.0
M12	15.0		34000	70.0
M12	16.0		34000	70.0

Inserti filettati RIVSERT ciechi

Closed end RIVSERT rivet nuts

SFTE



■ Acciaio zincato


Zinc-plated steel

Fusto esagonale cieco

Closed end hexagonal shank

Testa tonda

Dome head

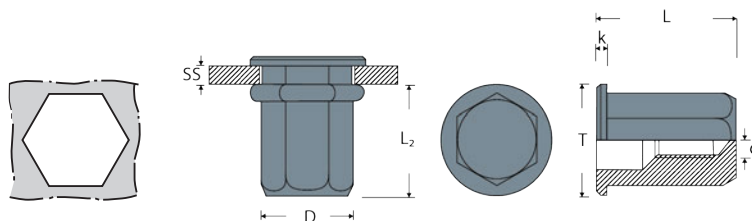

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M4	6,0	5,9	9,0	1,0	0,5 ÷ 2,0	15,0	10,0 ÷ 11,0	1774700	1000	8000
M4	6,0	5,9	9,0	1,0	2,0 ÷ 4,0	18,0	10,0 ÷ 11,0	1774800	500	8000
M5	7,0	6,9	10,0	1,0	0,5 ÷ 2,5	18,0	13,0 ÷ 14,0	1774900	500	6000
M5	7,0	6,9	10,0	1,0	2,5 ÷ 5,0	20,0	13,0 ÷ 14,0	1775000	500	6000
M6	9,0	8,9	13,0	1,5	0,5 ÷ 3,0	23,0	16,0 ÷ 17,0	1225100	250	2500
M6	9,0	8,9	13,0	1,5	3,0 ÷ 5,0	24,75	16,0 ÷ 17,0	1775100	250	2500
M8	11,0	10,9	16,0	1,5	1,0 ÷ 3,5	26,0	18,0 ÷ 19,0	1732000	100	1500
M8	11,0	10,9	16,0	1,5	3,5 ÷ 5,5	28,5	18,0 ÷ 19,0	6480800	100	1000
M8	11,0	10,9	16,0	1,5	3,5 ÷ 6,0	27,5	18,0 ÷ 19,0	1775200	100	1500
M10	13,0	12,9	19,0	2,0	1,0 ÷ 4,0	33,0	24,0 ÷ 25,0	1731900	50	800
M10	13,0	12,9	17,0	1,7	3,5 ÷ 6,0	33,0	24,0 ÷ 25,0	1775300	100	500

Carico di prova assiale del filetto
Axial proof load for thread



Coppia di serraggio
Clamping torque



d			N	Nm
mm	mm	mm		
M4	6.0		6800	5.0
M5	7.0		11500	8.5
M6	9.0		16500	15.0
M8	11.0		25000	26.0
M10	13.0		32000	50.0

Inserti filettati RIVSERT ciechi

Closed end RIVSERT rivet nuts

SFRE



■ Acciaio zincato


Zinc-plated steel

Fusto esagonale cieco

Closed end hexagonal shank

Testa ridotta

Reduced head

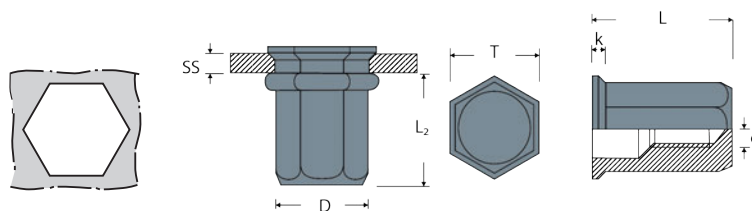

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M4	6,0	5,9	7,0	0,5	0,5 ÷ 2,5	16,0	11,0 ÷ 12,0	1772700	1000	10000
M4	6,0	5,9	7,0	0,5	1,5 ÷ 4,0	16,5	11,0 ÷ 12,0	1772800	1000	10000
M5	7,0	6,9	8,0	0,5	0,5 ÷ 3,0	20,0	14,0 ÷ 15,0	0324700	500	5000
M6	9,0	8,9	10,0	0,6	0,5 ÷ 3,5	20,5	16,0 ÷ 16,7	0324800	250	3000
M6	9,0	8,9	10,0	0,6	2,5 ÷ 5,5	24,0	16,0 ÷ 16,7	1773100	250	3000
M8	11,0	10,9	12,0	0,65	1,0 ÷ 4,0	23,0	19,0 ÷ 20,0	1773200	200	2000
M8	11,0	10,9	12,0	0,65	3,5 ÷ 6,0	27,5	19,0 ÷ 20,0	1773300	100	1500
M10	13,0	12,9	14,5	0,75	1,0 ÷ 4,5	28,5	20,5 ÷ 21,5	4369200	100	1000
M10	13,0	12,9	14,5	0,75	3,0 ÷ 6,0	32,5	20,5 ÷ 21,5	2445800	100	1000

Carico di prova assiale del filetto
Axial proof load for thread



Coppia di serraggio
Clamping torque



d			N	Nm
mm	mm	mm		
M4	6.0		6800	4.0
M5	7.0		11500	8.0
M6	9.0		16500	15.0
M8	11.0		25000	26.0
M10	13.0		32000	45.0

Inserti filettati RIVSERT AISI 304

AISI 304 RIVSERT rivet nuts

ITC/A2



Acciaio inox AISI 304


AISI 304 stainless steel

Fusto cilindrico aperto

Open cylindrical shank

Testa tonda

Dome head

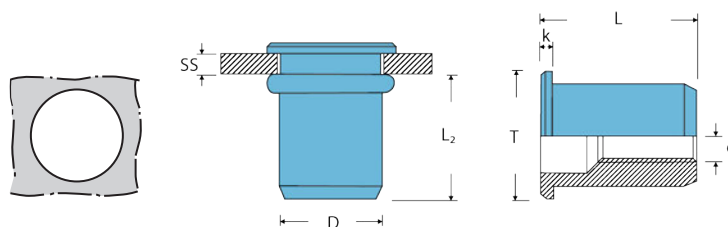

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M4	6,0	5,9	8,5	0,8	0,5 ÷ 2,0	10,5	5.5 ÷ 6.0	2874400	500	10000
M4	6,0	5,9	8,5	0,8	2,5 ÷ 4,0	13,0		3351300		
M5	7,0	6,9	10,0	1,0	0,5 ÷ 2,5	13,0	7.2 ÷ 7.7	2677600	250	8000
M5	7,0	6,9	10,0	1,0	3,1 ÷ 4,0	15,5		3351400	250	8000
M6	9,0	8,9	12,3	1,35	0,5 ÷ 3,0	15,5	7.6 ÷ 8.2	2677700	250	4000
M6	9,0	8,9	12,3	1,35	3,0 ÷ 4,5	16,0		2740400	200	4000
M8	11,0	10,9	15,0	1,5	0,5 ÷ 3,5	18,5	9.5 ÷ 10.1	2677800	250	2500
M8	11,0	10,9	15,0	1,5	3,1 ÷ 5,5	20,0		2678000	100	-
M8	11,0	10,9	15,0	1,5	3,0 ÷ 6,0	20,0		3055800		
M10	12,0	11,9	16,0	1,6	0,8 ÷ 3,0	21,0	13.0 ÷ 14.0	2677900	100	1500
M10	13,0	12,9	17,0	1,6	1,0 ÷ 4,0	21,0		4287600	100	1500
M12	16,0	15,9	23,0	2,0	1,0 ÷ 4,0	26,0	14.5 ÷ 15.5	3742900		

Inserti filettati RIVSERT AISI 316

AISI 316 RIVSERT rivet nuts

ITC/A4



Acciaio inox AISI 316


AISI 316 stainless steel

Fusto cilindrico aperto

Open cylindrical shank

Testa tonda

Dome head

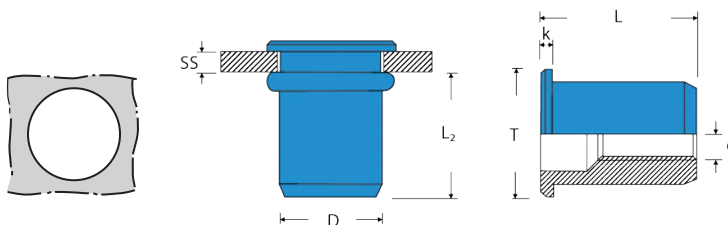

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M4	6,0	5,9	9,0	1,0	0,5 ÷ 2,0	11,0	6.0 ÷ 6.5	4769000	500	10000
M5	7,0	6,9	10,0	1,0	0,5 ÷ 3,0	12,5	7.2 ÷ 7.7	4181100	500	8000
M6	9,0	8,9	12,0	1,5	0,5 ÷ 3,0	16,0	7.6 ÷ 8.2	4421500	250	4000
M8	11,0	10,9	15,0	1,5	0,5 ÷ 3,0	17,5	9.5 ÷ 10.1	4329400	250	2500

Carico di prova assiale del filetto
Axial proof load for thread



Coppia di serraggio
Clamping torque



d			N	Nm
mm	mm	mm		
M4		6.0	6800	5.0
M5		7.0	11500	8.5
M6		9.0	16500	15.0
M8		11.0	25000	26.0
M10		12.0	32000	50.0
M10		13.0	32000	50.0
M12		16.0	34000	80.0

Inserti filettati RIVSERT AISI 304

AISI 304 RIVSERT rivet nuts

IRC/A2



Acciaio inox AISI 304


AISI 304 stainless steel

Fusto cilindrico aperto

Open cylindrical shank

Testa ridotta

Reduced head

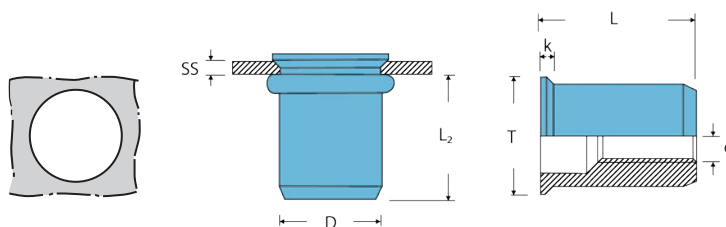

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M3	5,0	4,9	5,5	0,3	0,5 ÷ 2,0	8,5	4,2 ÷ 4,6	3386200	1000	20000
M4	6,0	5,9	7,0	0,5	0,5 ÷ 2,0	10,5	6,5 ÷ 7,0	2734900	1000	16000
M4	6,0	5,9	7,0	0,5	2,5 ÷ 4,0	13,0	6,5 ÷ 7,0	4817100	500	-
M5	7,0	6,9	8,0	0,5	0,5 ÷ 2,0	11,5	8,0 ÷ 8,5	2678100	500	10000
M6	9,0	8,9	10,0	0,6	0,5 ÷ 2,5	14,0	9,0 ÷ 9,7	2678200	250	5000
M8	11,0	10,9	12,0	0,65	0,5 ÷ 3,0	16,5	10,0 ÷ 11,5	2678300	250	3000
M8	11,0	10,9	12,0	0,65	3,0 ÷ 6,0	19,5	10,0 ÷ 11,5	1054400		
M10	13,0	12,9	14,0	0,7	1,0 ÷ 4,0	18,0	12,0 ÷ 13,0	0388200	100	1500
M12	16,0	15,9	17,2	0,6	3,5 ÷ 7,5	27,5	12,0 ÷ 13,0	4060200	50	-

Inserti filettati RIVSERT AISI 316

AISI 316 RIVSERT rivet nuts

IRC/A4



Acciaio inox AISI 316


AISI 316 stainless steel

Fusto cilindrico aperto

Open cylindrical shank

Testa ridotta

Reduced head

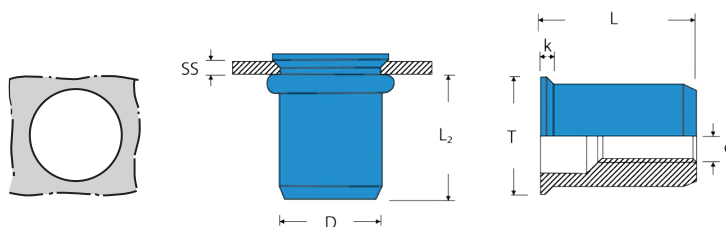

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M5	7,0	6,9	7,5	0,5	0,5 ÷ 3,0	12,0	8,0 ÷ 8,5	4421600	250	10000
M6	9,0	8,9	9,5	0,5	0,5 ÷ 3,0	14,5	9,0 ÷ 9,7	4421700	250	5000
M8	11,0	10,9	11,5	0,5	0,5 ÷ 3,0	16,0	10,7 ÷ 11,4	4421800	250	3000

Carico di prova assiale del filetto
Axial proof load for thread



Coppia di serraggio
Clamping torque



d			N	Nm
mm	mm	mm		
M3		5.0	3900	1.0
M4		6.0	6800	4.0
M5		7.0	11500	8.0
M6		9.0	16500	15.0
M8		11.0	25000	26.0
M10		13.0	32000	45.0
M12		16.0		

Inserti filettati RIVSERT AISI 304 - foro in pollici

AISI 304 RIVSERT rivet nuts - inch hole

IRC-P/A2



Acciaio inox AISI 304


AISI 304 stainless steel

Fusto cilindrico aperto

Open cylindrical shank

Testa ridotta

Reduced head

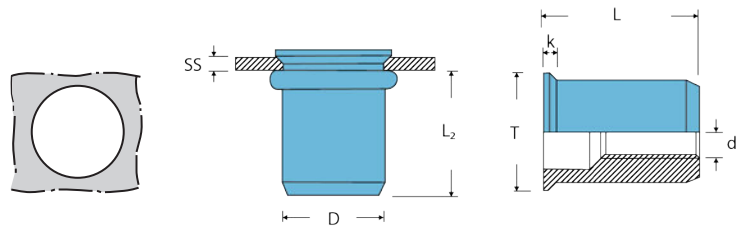

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M3	4,7	4,6	5,3	0,3	0,5 ÷ 1,5	9,0	5.2 ÷ 5.6	1740800	500	20000
M4	6,3	6,2	6,9	0,5	0,5 ÷ 2,0	10,5	6.3 ÷ 6.7	1740900	500	16000
M5	7,1	7,0	7,7	0,5	0,5 ÷ 3,0	12,0	7.4 ÷ 7.8	1741000	500	10000
M6	9,5	9,4	10,2	0,5	0,7 ÷ 3,0	14,0	8.8 ÷ 9.6	1741100	500	5000
M8	10,5	10,4	11,3	0,5	1,0 ÷ 3,5	16,0	10 ÷ 10.8	1741200	250	3000

Carico di prova assiale del filetto

Axial proof load for thread



Coppia di serraggio

Clamping torque



d			N	Nm
mm	mm	mm		
M3		4.8	3900	1.0
M4		6.4	6800	4.0
M5		7.2	11500	8.0
M6		9.6	16500	15.0
M8		10.6	25000	26.0

Inserti filettati RIVSERT AISI 304

AISI 304 RIVSERT rivet nuts

ISC/A2



Acciaio inox AISI 304


AISI 304 stainless steel

Fusto cilindrico aperto

Open cylindrical shank

Testa svasata

Countersunk head

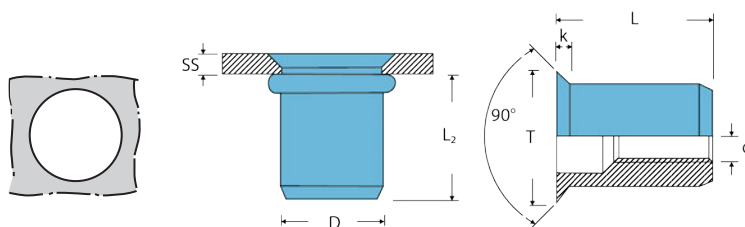

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M4	6,0	5,9	9,0	1,5	1,5 ÷ 3,0	12,0	4,5 ÷ 5,5	1738200		
M5	7,0	6,9	10,0	1,5	1,5 ÷ 3,5	13,0	6,5 ÷ 7,0	3138500	250	8000
M6	9,0	8,9	12,0	1,5	1,5 ÷ 4,0	15,5	8,5 ÷ 9,5	3139200	250	7000
M6	9,0	8,9	12,0	1,5	3,8 ÷ 6,0	17,0	8,5 ÷ 9,5	4870000		
M8	11,0	10,9	14,0	1,5	2,0 ÷ 4,5	18,5	9,5 ÷ 11,5	3353400	250	3000
M8	11,0	10,9	14,0	1,5	4,0 ÷ 6,0	19,0	9,5 ÷ 11,5	0317600	200	2500
M10	12,0	11,9	15,0	1,5	1,5 ÷ 4,0	18,0	12,0 ÷ 14,5	1736400	200	2000
M10	12,0	11,9	15,0	1,5	3,0 ÷ 6,0	20,0	12,0 ÷ 14,5	4866200		
M12	16,0	15,9	19,0	1,9	1,7 ÷ 4,5	26,0	14,5 ÷ 16,5	4351000	50	800

Carico di prova assiale del filetto

Axial proof load for thread



Coppia di serraggio

Clamping torque



d			N	Nm
mm	mm	mm		
M4	6.0		6800	3.0
M5	7.0		11500	6.0
M6	9.0		16500	11.0
M8	11.0		25000	20.0
M10	13.0		32000	32.0
M12	16.0		34000	50.0

Inserti filettati RIVSERT AISI 304 ciechi

Closed end AISI 304 RIVSERT rivet nuts

SITC/A2



Acciaio inox AISI 304


AISI 304 stainless steel

Fusto cilindrico cieco

Closed end cylindrical shank

Testa tonda

Dome head

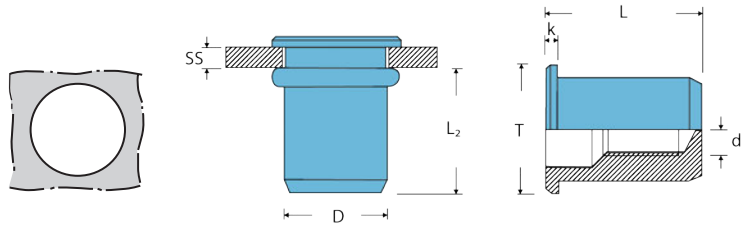

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M6	9,0	8,9	12,3	1,3	0,5 ÷ 3,0	19,2	13,0 ÷ 14,0	4406900	250	2500
M8	11,0	10,9	15,0	1,5	1,0 ÷ 3,5	21,5	14,0 ÷ 16,0	4467600	200	2000
M10	13,0	12,9	17,0	1,6	1,0 ÷ 4,0	27,0	16,0 ÷ 18,0	4543700	500	1000

Carico di prova assiale del filetto
Axial proof load for thread



Coppia di serraggio
Clamping torque



d			N	Nm
mm	mm	mm		
M6	9.0		16500	15.0
M8	11.0		25000	26.0
M10	13.0		32000	50.0

Inserti filettati RIVSERT AISI 304 ciechi

Closed end AISI 304 RIVSERT rivet nuts

SIRC/A2



Acciaio inox AISI 304


AISI 304 stainless steel

Fusto cilindrico cieco

Closed end cylindrical shank

Testa ridotta

Reduced head

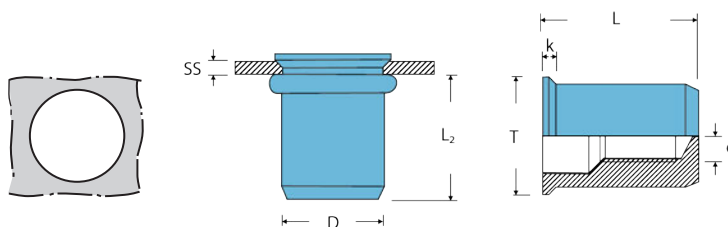

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M4	6,0	5,9	7,0	0,5	0,5 ÷ 2,0	15,0	10,5 ÷ 11,5	2538200	1000	5000
M5	7,0	6,9	8,0	0,5	0,5 ÷ 3,0	17,5	12,0 ÷ 13,0	3424800	250	7000
M8	11,0	10,9	12,0	0,65	0,5 ÷ 3,0	23,0	17,0 ÷ 18,0	4474900	250	2000

Carico di prova assiale del filetto
Axial proof load for thread



Coppia di serraggio
Clamping torque



d			N	Nm
mm	mm	mm		
M4	6.0		6800	4.0
M5	7.0		11500	8.0
M8	11.0		25000	26.0

Inserti filettati RIVSERT AISI 304 zigrinati

AISI 304 RIVSERT knurled rivet nuts

ITC-Z/A2



Acciaio inox AISI 304


AISI 304 stainless steel

Fusto cilindrico zigrinato aperto

Open knurled cylindrical shank

Testa tonda

Dome head

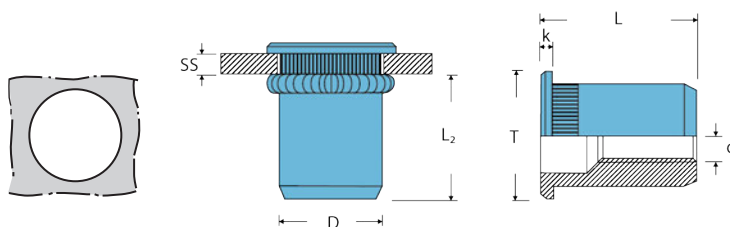

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M3	5,0	4,9	8,0	0,8	0,5 ÷ 2,0	9,0	5,5 ÷ 6,0	3213900	1000	10000
M4	6,0	5,9	9,0	0,8	0,5 ÷ 2,0	10,5	6,0 ÷ 6,5	3214300	500	10000
M4	6,0	5,9	9,0	0,8	2,5 ÷ 4,0	12,5	6,0 ÷ 6,5	4328400	500	10000
M5	7,0	6,9	10,0	1,0	0,5 ÷ 2,5	13,0	7,0 ÷ 8,0	3214400	250	8000
M5	7,0	6,9	10,0	1,0	2,0 ÷ 4,0	15,0	7,0 ÷ 8,0	4733100	250	8000
M5	7,0	6,9	10,0	1,0	4,0 ÷ 6,0	17,0	7,0 ÷ 8,0	3731500	500	8000
M6	9,0	8,9	12,3	1,35	0,5 ÷ 3,0	15,5	8,0 ÷ 9,0	3214500	250	4000
M6	9,0	8,9	12,3	1,35	3,5 ÷ 6,0	19,0	8,0 ÷ 9,0	3348100	250	3000
M8	11,0	10,9	14,5	1,5	1,0 ÷ 3,5	18,5	10,0 ÷ 11,5	3214600	250	2500
M8	11,0	10,9	14,5	1,5	3,5 ÷ 6,0	21,0	10,0 ÷ 11,5	3279200	200	2000
M10	13,0	12,9	17,0	1,6	1,0 ÷ 4,0	21,0	12,5 ÷ 14,0	3214700	100	1500
M10	13,0	12,9	17,0	1,6	3,0 ÷ 6,0	26,0	12,5 ÷ 14,0	4325500	100	1000
M12	16,0	15,9	22,0	2,0	1,0 ÷ 4,0	25,0	14,5 ÷ 15,5	5031800	100	-

Carico di prova assiale del filetto
Axial proof load for thread



Coppia di serraggio
Clamping torque



d			N	Nm
mm	mm	mm		
M3	5.0		3900	2.0
M4	6.0		6800	5.0
M5	7.0		11500	8.5
M6	9.0		16500	15.0
M8	11.0		25000	26.0
M10	13.0		32000	50.0
M12	16.0			



Inserti filettati RIVSERT AISI 316 zigrinati

AISI 316 RIVSERT knurled rivet nuts

ITC-Z/A4



Acciaio inox AISI 316


AISI 316 stainless steel

Fusto cilindrico zigrinato aperto

Open knurled cylindrical shank

Testa tonda

Dome head

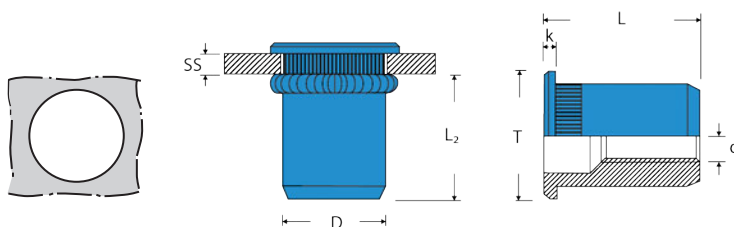

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M4	6,0	5,9	9,0	1,0	0,3 ÷ 3,0	10,0	6,0 ÷ 6,5	5812200	500	10000
M5	7,0	6,9	10,0	1,0	0,3 ÷ 3,0	12,0	7,0 ÷ 8,0	5812300	500	8000
M6	9,0	8,9	13,0	1,5	0,5 ÷ 3,0	16,0	8,0 ÷ 9,0	5812400	250	4000
M8	11,0	10,9	15,0	1,5	0,5 ÷ 3,0	18,0	10,0 ÷ 11,5	5812500	250	2500
M8	11,0	10,9	15,0	1,5	3,1 ÷ 5,5	20,0	10,0 ÷ 11,5	5957800	250	2500
M10	13,0	12,9	19,0	2,0	0,5 ÷ 3,0	17,0	12,5 ÷ 14,0	5812600	100	1000

Carico di prova assiale del filetto
Axial proof load for thread



Coppia di serraggio
Clamping torque



d			N	Nm
mm	mm	mm		
M4	6.0		6800	5.0
M5	7.0		11500	8.5
M6	9.0		16500	15.0
M8	11.0		25000	26.0
M10	13.0		32000	50.0

Inserti filettati RIVSERT AISI 304 zigrinati

AISI 304 RIVSERT knurled rivet nuts

IRC-Z/A2



Acciaio inox AISI 304


AISI 304 stainless steel

Fusto cilindrico zigrinato aperto

Open knurled cylindrical shank

Testa ridotta

Reduced head

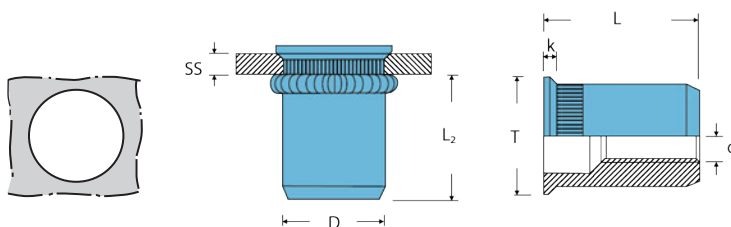

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M3	5,0	4,9	6,0	0,5	0,5 ÷ 2,0	8,5	4,0 ÷ 4,5	3214000	1000	20000
M3	5,0	4,9	6,0	0,5	1,5 ÷ 2,5	10,0	4,0 ÷ 4,5	4007400	1000	20000
M4	6,0	5,9	7,0	0,5	0,5 ÷ 2,0	10,5	6,5 ÷ 7,0	3214800	500	16000
M4	6,0	5,9	7,0	0,5	2,5 ÷ 4,0	13,0	6,5 ÷ 7,0	1693500	500	13000
M5	7,0	6,9	8,0	0,5	0,5 ÷ 2,0	11,5	7,5 ÷ 8,5	1740700	500	10000
M5	7,0	6,9	8,0	0,5	2,5 ÷ 4,5	13,0	7,5 ÷ 8,5	1237500	500	8000
M6	9,0	8,9	10,0	0,6	0,5 ÷ 2,5	14,0	8,5 ÷ 10,0	3215000	500	5000
M6	9,0	8,9	10,0	0,6	3,5 ÷ 6,0	17,5	8,5 ÷ 10,0	4281900	250	3000
M8	11,0	10,9	12,0	0,65	0,5 ÷ 3,0	16,5	10,5 ÷ 11,5	3215100	250	3000
M8	11,0	10,9	12,0	0,65	3,0 ÷ 6,0	19,5	10,5 ÷ 11,5	4281800	250	2500
M10	13,0	12,9	14,0	0,7	1,0 ÷ 3,5	17,5	11,0 ÷ 13,0	3215200	200	1500
M10	13,0	12,9	14,0	0,7	3,0 ÷ 6,0	23,0	11,0 ÷ 13,0	4811000	200	1500
M12	16,0	15,9	17,2	0,75	1,0 ÷ 4,0	24,0	14,5 ÷ 15,5	5561000	100	500

Carico di prova assiale del filetto
Axial proof load for thread



Coppia di serraggio
Clamping torque



d		N	Nm
mm	mm		
M3	5.0	3900	1.0
M4	6.0	6800	4.0
M5	7.0	11500	8.0
M6	9.0	16500	15.0
M8	11.0	25000	26.0
M10	13.0	32000	45.0
M12	16.0	34000	50.0



Inserti filettati RIVSERT AISI 316 zigrinati

AISI 316 RIVSERT knurled rivet nuts

IRC-Z/A4



Acciaio inox AISI 316


AISI 316 stainless steel

Fusto cilindrico zigrinato aperto

Open knurled cylindrical shank

Testa ridotta

Reduced head

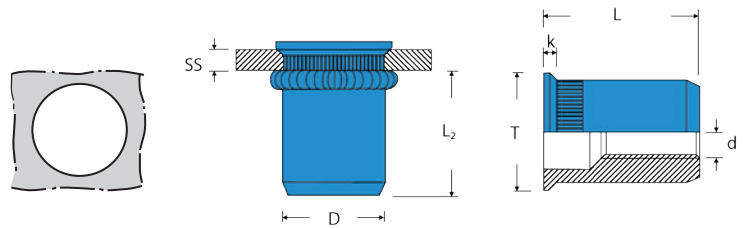

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M4	6,0	5,9	7,0	0,8	0,5 ÷ 2,5	10,0	6,5 ÷ 7,0	5812900	500	10000
M5	7,0	6,9	8,0	0,8	0,5 ÷ 2,5	11,5	7,5 ÷ 8,5	5047200	500	8000
M6	9,0	8,9	10,0	0,8	0,5 ÷ 3,0	14,0	8,5 ÷ 10,0	5813000	250	4000
M8	11,0	10,9	12,0	0,8	0,5 ÷ 3,0	15,5	10,5 ÷ 11,5	5813100	250	2500
M10	13,0	12,9	14,5	1,0	0,8 ÷ 3,5	19,5	11,0 ÷ 13,0	5813200	100	1000

Carico di prova assiale del filetto
Axial proof load for thread



Coppia di serraggio
Clamping torque



d			N	Nm
mm	mm	mm		
M4	6.0		6800	4.0
M5	7.0		11500	8.0
M6	9.0		16500	15.0
M8	11.0		25000	26.0
M10	13.0		32000	45.0

Inserti filettati RIVSERT AISI 304 zigrinati

AISI 304 RIVSERT knurled rivet nuts

ISC-Z/A2



Acciaio inox AISI 304


AISI 304 stainless steel

Fusto cilindrico zigrinato aperto

Open knurled cylindrical shank

Testa svasata

Countersunk head

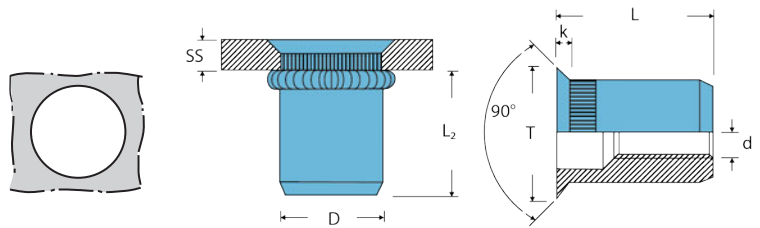

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M3	5,0	4,9	8,0	1,5	1,5 ÷ 3,0	9,5	4,5 ÷ 5,5	4325000	1000	20000
M4	6,0	5,9	9,0	1,5	1,5 ÷ 3,0	12,0	6,0 ÷ 6,5	4368200	500	10000
M4	6,0	5,9	9,0	1,5	3,5 ÷ 5,0	13,0	6,0 ÷ 6,5	4325200	500	10000
M5	7,0	6,9	10,0	1,5	1,5 ÷ 3,5	13,0	6,5 ÷ 7,0	4325100	500	8000
M5	7,0	6,9	10,0	1,5	4,0 ÷ 6,0	15,0	6,5 ÷ 7,0	4368300	250	7000
M6	9,0	8,9	12,0	1,5	1,5 ÷ 4,0	15,5	8,5 ÷ 9,5	4312500	250	4000
M6	9,0	8,9	12,0	1,5	4,5 ÷ 6,5	19,0	8,5 ÷ 9,5	3669400	250	3000
M8	11,0	10,9	14,0	1,5	2,0 ÷ 4,5	18,5	9,5 ÷ 11,0	4331500	250	2500
M8	11,0	10,9	14,0	1,5	3,5 ÷ 6,5	21,0	9,5 ÷ 11,0	4368400	250	2000
M10	13,0	12,9	16,0	1,5	1,5 ÷ 4,0	22,0	12,0 ÷ 14,5	4325300	100	2000
M10	13,0	12,9	16,0	1,5	3,5 ÷ 6,5	25,0	12,0 ÷ 14,5	4325400	50	1500
M12	16,0	15,9	19,0	1,9	1,7 ÷ 4,5	26,0	14,5 ÷ 16,5	5929600	50	800

Carico di prova assiale del filetto
Axial proof load for thread



Coppia di serraggio
Clamping torque



d			N	Nm
mm	mm	mm		
M3	5.0		3900	1.0
M4	6.0		6800	3.0
M5	7.0		11500	6.0
M6	9.0		16500	11.0
M8	11.0		25000	20.0
M10	13.0		32000	32.0
M12	16.0			

Inserti filettati RIVSERT AISI 304 zigrinati ciechi

Closed end AISI 304 RIVSERT knurled rivet nuts

SITC-Z/A2



Acciaio inox AISI 304


AISI 304 stainless steel

Fusto cilindrico zigrinato cieco

Closed end knurled cylindrical shank

Testa tonda

Dome head

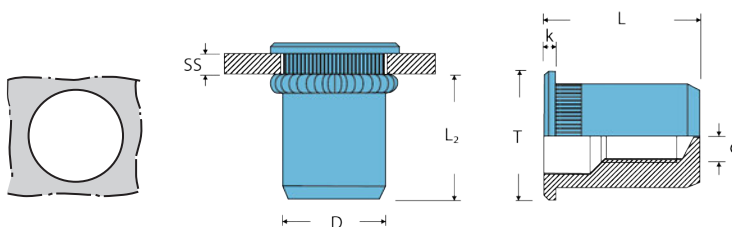

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M4	6,0	5,9	9,0	0,8	0,5 ÷ 2,0	16,0	10,5 ÷ 11,5	1922800	500	8000
M5	7,0	6,9	10,0	1,0	0,5 ÷ 2,5	17,0	12,0 ÷ 13,0	3009700	250	5000
M6	9,0	8,9	12,3	1,35	0,5 ÷ 3,0	19,2	13,0 ÷ 14,0	3009800	250	3000
M8	11,0	10,9	14,5	1,5	1,0 ÷ 3,5	27,0	14,0 ÷ 15,0	4368000	250	2000
M10	13,0	12,9	17,0	1,6	1,0 ÷ 4,0	33,5	16,0 ÷ 18,0	4368100	50	1000

Carico di prova assiale del filetto
Axial proof load for thread



Coppia di serraggio
Clamping torque



d			N	Nm
mm	mm	mm		
M4	6.0		6800	5.0
M5	7.0		11500	8.5
M6	9.0		16500	15.0
M8	11.0		25000	26.0
M10	13.0		32000	50.0

Inserti filettati RIVSERT AISI 304 zigrinati ciechi

Closed end AISI 304 RIVSERT knurled rivet nuts

SIRC-Z/A2



Acciaio inox AISI 304


AISI 304 stainless steel

Fusto cilindrico zigrinato cieco

Closed end knurled cylindrical shank

Testa ridotta

Reduced head

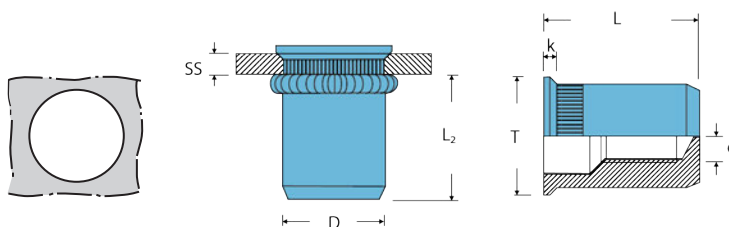

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M4	6,0	5,9	7,0	0,5	0,5 ÷ 2,0	15,0	10,5 ÷ 11,5	3158300	500	10000
M5	7,0	6,9	8,0	0,5	0,5 ÷ 2,0	16,5	12,0 ÷ 13,0	2538300	250	7000
M6	9,0	8,9	10,0	0,6	0,5 ÷ 2,5	20,0	15,0 ÷ 16,0	2610400	250	3000
M8	11,0	10,9	12,0	0,65	0,5 ÷ 3,0	26,0	17,0 ÷ 18,0	4367800	250	2000
M10	13,0	12,9	14,0	0,7	1,0 ÷ 4,0	33,0	18,0 ÷ 19,0	4367900	50	1000

Carico di prova assiale del filetto
Axial proof load for thread



Coppia di serraggio
Clamping torque



d			N	Nm
mm	mm	mm		
M4	6.0		6800	4.0
M5	7.0		11500	8.0
M6	9.0		16500	15.0
M8	11.0		25000	26.0
M10	13.0		32000	45.0

Inserti filettati RIVSERT AISI 304

AISI 304 RIVSERT rivet nuts

ITEP/A2

Acciaio inox AISI 304


AISI 304 stainless steel

Fusto semiesagonale aperto

Open semi-hexagonal shank

Testa tonda

Dome head

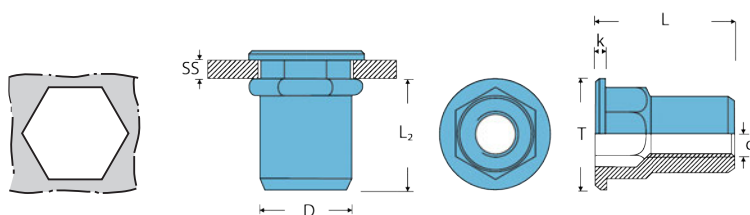

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M4	6,0	5,9	9,0	0,8	0,5 ÷ 2,0	11,0	6,0 ÷ 6,5	3214200	500	10000
M5	7,0	6,9	10,0	1,0	0,5 ÷ 2,5	12,0	7,0 ÷ 8,0	3215300	250	8000
M6	9,0	8,9	12,7	1,35	0,5 ÷ 3,0	15,5	9,0 ÷ 10,0	3215400	250	4000
M6	9,0	8,9	12,7	1,35	3,5 ÷ 6,0	19,0	9,0 ÷ 10,0	4573100	250	2000
M8	11,0	10,9	16,0	1,5	1,0 ÷ 3,5	18,0	11,0 ÷ 12,0	3215500	250	2000
M8	11,0	10,9	16,0	1,5	3,0 ÷ 5,5	20,2	11,0 ÷ 12,0	3769100	200	1500
M10	13,0	12,9	18,0	1,7	1,0 ÷ 4,0	21,0	15,0 ÷ 16,0	3215600	100	1500
M10	13,0	12,9	18,0	1,7	4,0 ÷ 6,0	23,0	15,0 ÷ 16,0	5984900	100	1000
M12	16,0	15,9	23,0	2,0	1,0 ÷ 4,0	28,0	16,5 ÷ 17,5	4520100	50	1000

Inserti filettati RIVSERT AISI 316

AISI 316 RIVSERT rivet nuts (Aisi 316)

ITEP/A4

Acciaio inox AISI 316


AISI 316 stainless steel

Fusto semiesagonale aperto

Open semi-hexagonal shank

Testa tonda

Dome head

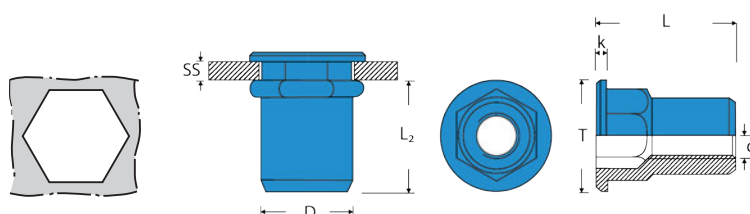

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M6	9,0	8,9	12,0	1,5	0,5 ÷ 3,0	16,0	9,3 ÷ 9,7	4422100	500	4000
M8	11,0	10,9	16,0	1,5	0,5 ÷ 3,0	17,5	10,8 ÷ 11,5	4194900	250	2000
M10	13,0	12,9	17,0	1,5	0,8 ÷ 3,5	23,0	15,0 ÷ 16,5	5018600	100	1500

Carico di prova assiale del filetto
Axial proof load for thread



Coppia di serraggio
Clamping torque



d		N	Nm
mm	mm		
M4	6,0	6800	5,0
M5	7,0	11500	8,5
M6	9,0	16500	15,0
M8	11,0	25000	26,0
M10	13,0	32000	50,0
M12	16,0	34000	80,0

Inserti filettati RIVSERT AISI 304

AISI 304 RIVSERT rivet nuts

IREP/A2



Acciaio inox AISI 304


AISI 304 stainless steel

Fusto semiesagonale aperto

Open semi-hexagonal shank

Testa ridotta

Reduced head

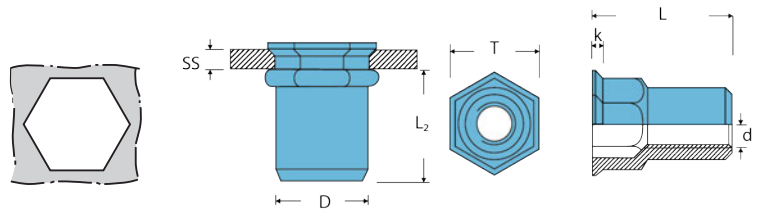

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M3	5,0	4,9	5,8	0,5	0,5 ÷ 1,5	9,0	5,0 ÷ 5,5	3730900	1000	20000
M3	5,0	4,9	5,8	0,5	1,5 ÷ 2,5	10,0	5,0 ÷ 5,5	5586400	1000	20000
M4	6,0	5,9	7,0	0,5	0,5 ÷ 2,0	12,0	6,5 ÷ 7,5	0383800	500	10000
M4	6,0	5,9	7,0	0,5	2,0 ÷ 3,0	13,0	6,5 ÷ 7,5	3214100	500	10000
M4	6,0	5,9	7,0	0,5	2,0 ÷ 4,0	14,0	6,5 ÷ 7,5	5182000	500	-
M5	7,0	6,9	8,0	0,5	0,5 ÷ 2,5	13,0	7,0 ÷ 8,0	3215700	500	8000
M5	7,0	6,9	8,0	0,5	2,5 ÷ 4,0	15,0	7,0 ÷ 8,0	5905100	500	8000
M5	7,0	6,9	8,0	0,5	4,0 ÷ 6,0	17,0	7,0 ÷ 8,0	4353400	250	6000
M6	9,0	8,9	10,0	0,6	0,5 ÷ 3,0	16,0	9,0 ÷ 10,0	3215800	500	4000
M6	9,0	8,9	10,0	0,6	3,0 ÷ 5,5	18,0	9,0 ÷ 10,0	3341200	500	4000
M6	9,0	8,9	10,0	0,6	5,0 ÷ 7,0	18,5	9,0 ÷ 10,0	3344900	500	-
M8	11,0	10,9	12,0	0,65	1,0 ÷ 3,5	17,5	9,5 ÷ 10,5	3215900	250	2500
M8	11,0	10,9	12,0	0,65	3,5 ÷ 6,0	20,25	9,5 ÷ 10,5	3314700	250	2000
M10	13,0	12,9	14,5	0,75	1,5 ÷ 4,0	20,0	11,0 ÷ 13,0	3216000	100	1500
M10	13,0	12,9	14,5	0,75	3,0 ÷ 6,0	23,0	11,0 ÷ 13,0	4035900	100	1000
M12	16,0	15,9	18,0	0,8	1,0 ÷ 4,0	24,0	16,0 ÷ 18,0	4331600	100	1000
M12	16,0	15,9	17,2	0,8	4,0 ÷ 7,0	26,0	16,0 ÷ 18,0	5287700	100	-

Carico di prova assiale del filetto
Axial proof load for thread



Coppia di serraggio
Clamping torque



d			N	Nm
mm	mm	mm		
M3	5.0		3900	1.0
M4	6.0		6800	4.0
M5	7.0		11500	8.0
M6	9.0		16500	15.0
M8	11.0		25000	26.0
M10	13.0		32000	45.0
M12	16.0		34000	70.0



Inserti filettati RIVSERT AISI 316

AISI 316 RIVSERT rivet nuts

IREP/A4



Acciaio inox AISI 316


AISI 316 stainless steel

Fusto semiesagonale aperto

Open semi-hexagonal shank

Testa ridotta

Reduced head

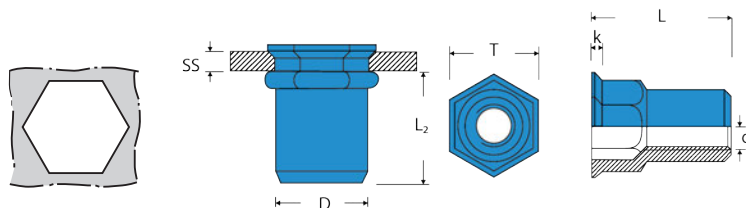

d		D	T	k	SS	L	L ₂	Codice		
mm	mm	mm	mm	max	mm	mm	min ÷ max	Item code	pz	pz
M4	6,0	5,9	6,5	0,5	0,5 ÷ 2,0	12,0	6,5 ÷ 7,5	4632600	500	14000
M5	7,0	6,9	8,0	0,6	0,5 ÷ 3,0	14,0	6,8 ÷ 7,2	4421900	500	8000
M6	9,0	8,9	10,0	0,6	0,5 ÷ 3,0	16,0	9,4 ÷ 9,6	4230600	500	4000
M6	9,0	8,9	10,0	0,6	3,0 ÷ 5,0	16,5	9,4 ÷ 9,6	5581800	500	-
M8	11,0	10,9	12,0	0,65	0,5 ÷ 3,0	17,0	9,5 ÷ 10,0	4422000	250	2500
M8	11,0	10,9	12,0	0,65	3,0 ÷ 5,5	18,5	9,5 ÷ 10,0	6201900		
M10	13,0	12,9	14,0	0,7	1,0 ÷ 3,5	20,5	9,5 ÷ 10,0	4626100	100	-
M10	13,0	12,9	14,0	0,7	3,5 ÷ 6,0	23,5	9,5 ÷ 10,0	6202000		

Carico di prova assiale del filetto
Axial proof load for thread



Coppia di serraggio
Clamping torque



d			N	Nm
mm	mm	mm		
M4		6.0	6800	4.0
M5		7.0	11500	8.0
M6		9.0	16500	15.0
M8		11.0	25000	26.0
M10		13.0	32000	45.0