

Rondella dentellata

UNI 8842 - DIN 6798A

Serrated lock washer

RDE

Tipo A - Esterna


Type A - External

C60 - Acciaio per Molle

C60 - Spring steel

Zincato bianco

White zinc plated

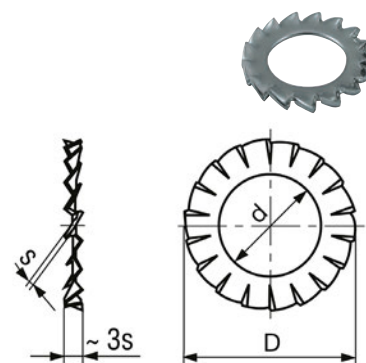

Per vite	d	D	s	Codice	
mm	mm	mm	mm	Item code	pz
M3	3,2	6,0	0,4	20894ZB	5.000
M4	4,3	8,0	0,5	20896ZB	2.000
M5	5,1	9,0	0,5	20897ZB	1.000
M5	5,3	10,0	0,6	20912ZB	1.000
M6	6,4	11,0	0,7	20898ZB	1.750
M8	8,2	14,0	0,8	20900ZB	1.000
M10	10,5	18,0	0,9	20901ZB	1.000
M12	12,5	20,5	1,0	20902ZB	1.000
M14	14,5	24,0	1,0	20903ZB	400

Rondella contact stretta

N FE 25-511 S

Contact small spring washer

RCS

Forma S - Conica


Form S - Conical

C60 - Acciaio per Molle

C60 - Spring steel

Zincato bianco

White zinc plated

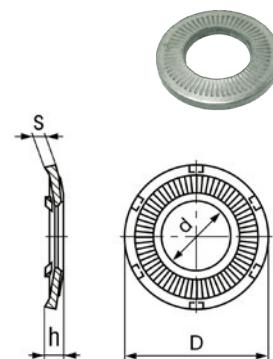

Per viti	d	D	s	h	Codice	
mm	min	max	min	min	Item code	pz
M4	4,1	8,0	0,8	1,00	57733ZB	2.000
M5	5,1	10,0	1,0	1,25	27941ZB	1.000
M6	6,1	12,0	1,2	1,55	18630ZB	2.000
M8	8,2	16,0	1,4	1,80	45931ZB	1.000
M10	10,2	20,0	1,6	2,10	65604ZB	800
M12	12,4	24,0	1,8	2,40	57734ZB	250

Acciaio Inox AISI 304

Stainless steel AISI 304

M3	3,1	6,0	0,5	0,80	5394900	2.000
M4	4,1	8,0	0,8	1,00	5511900	1.000
M5	5,1	10,0	1,0	1,25	4548700	1.000
M6	6,1	12,0	1,2	1,55	4548800	1.000
M8	8,2	16,0	1,4	1,80	4548900	1.000
M10	10,2	20,0	1,6	2,10	5985900	1.000
M12	12,4	24,0	1,8	2,40	5711000	500

Rondella contact media

N FE 25-511 M

Contact medium spring washer

RCM

Forma M - Conica


Form M - Conical

C60 - Acciaio per Molle

C60 - Spring steel

Zincato bianco

White zinc plated

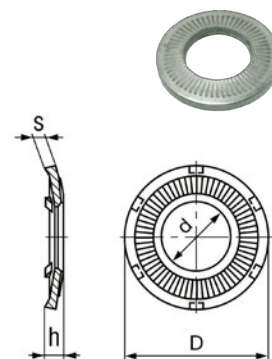

Per viti	d	D	s	h	Codice	
mm	min	max	min	min	Item code	pz
M4	4,1	10,0	0,9	1,15	45243ZB	2.000
M5	5,1	12,0	1,1	1,45	45244ZB	3.000
M6	6,1	14,0	1,3	1,75	45246ZB	1.000
M8	8,2	18,0	1,4	1,90	50774ZB	1.000
M10	10,2	22,0	1,6	2,25	51174ZB	1.000
M12	12,4	27,0	1,8	2,60	51175ZB	500

Acciaio Inox AISI 304

Stainless steel AISI 304

M3	3,1	8,0	0,6	0,80	4506700	1.000
M4	4,1	10,0	0,9	1,15	4516000	1.000
M5	5,1	12,0	1,1	1,45	4452300	1.000
M6	6,1	14,0	1,3	1,75	4506900	1.000
M8	8,2	18,0	1,4	1,90	4581800	1.000
M10	10,2	22,0	1,6	2,25	4446800	1.000
M12	12,4	27,0	1,8	2,60	5538200	500

Dado esagonale medio

UNI 5588 - DIN 934 - ISO 4032

Hexagon nut

DEM



Filettatura metrica ISO a passo grosso


ISO metric thread coarse pitch

Acciaio CL.8

Steel CL.8 grade

Zincato bianco

White zinc plated

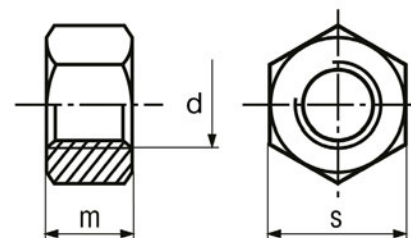

d	Passo	s	m	Codice	
mm	mm	mm	mm	Item code	pz
M2	0,4	4,0	1,6	22130ZB	1.000
M2,5	0,45	5,0	2,0	22132ZB	2.000
M3	0,5	5,5	2,4	22134ZB	1.000
M4	0,7	7,0	3,2	22135ZB	4.000
M5	0,8	8,0	4,7	22136ZB	2.000
M6	1	10,0	5,2	22137ZB	2.000
M8	1,25	13,0	6,8	22139ZB	1.000
M10	1,5	16,0	8,4	22140ZB	500
M12	1,75	18,0	10,8	22141ZB	250
M14	2	21,0	12,8	22142ZB	200
M16	2	24,0	14,8	22143ZB	100
M18	2,5	27,0	15,8	22144ZB	100
M20	2,5	30,0	18,0	22145ZB	100

Acciaio Inox AISI 304

Stainless steel AISI 304

M3	0,5	5,5	2,4	1464400	1.000
M4	0,7	7,0	3,2	1464500	1.000
M5	0,8	8,0	4,7	1464600	1.000
M6	1	10,0	5,2	1464700	1.000
M8	1,25	13,0	6,8	1464900	500
M10	1,5	16,0	8,4	1465200	200
M12	1,75	18,0	10,8	1465500	200
M14	2	21,0	12,8	1465700	100
M16	2	24,0	14,8	1465900	100

Dado esagonale basso

UNI 5589 - DIN 936 - ISO 4035

Low hexagon nut

DEB



Filettatura metrica ISO a passo grosso


ISO metric thread coarse pitch

Acciaio CL.8

Steel CL.8 grade

Zincato bianco

White zinc plated

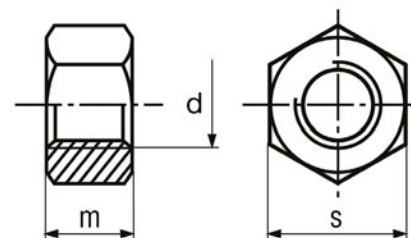

d	Passo	s	m	Codice	
mm	mm	mm	mm	Item code	pz
M4	0,7	7,0	2,8	22153ZB	5.000
M5	0,8	8,0	3,5	22154ZB	2.500
M6	1	10,0	4,0	22155ZB	2.000
M8	1,25	13,0	5,0	22157ZB	1.000

Dado esagonale autobloccante

UNI 7473 - DIN 982 - ISO 7040

Prevailing torque type hexagon nut

DEAA



Con inserto non metallico - Tipo alto

With non-metal insert - High type

Filettatura metrica ISO a passo grosso


ISO metric thread coarse pitch

Acciaio cl.8

Steel cl.8 grade

Zincato bianco

White zinc plated

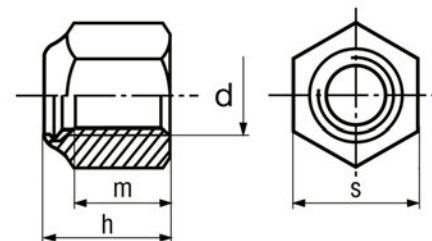

d	Passo	s	h	m	Codice	
mm	mm	mm	mm	mm	Item code	pz
M3	0,5	5,5	4,4	2,4	07649ZB	5.000
M4	0,7	7,0	6,0	3,2	07650ZB	2.000
M5	0,8	8,0	6,3	4,0	07651ZB	2.500
M6	1	10,0	8,0	5,0	07652ZB	1.000
M8	1,25	13,0	9,5	6,5	07654ZB	600
M10	1,5	17,0	11,5	8,0	07655ZB	300
M12	1,75	19,0	14,0	10,0	07656ZB	200
M14	2	22,0	16,0	12,0	07657ZB	150
M16	2	24,0	18,0	14,0	07658ZB	100
M18	2,5	27,0	20,0	15,0	07659ZB	100
M20	2,5	30,0	22,0	16,0	07660ZB	50

Dado esagonale autobloccante

UNI 7473 - DIN 982 - ISO 7040

Prevailing torque type hexagon nut

DEAA



Con inserto non metallico - Tipo alto


With non-metal insert - High type

Filettatura metrica ISO a passo grosso

ISO metric thread coarse pitch

Acciaio Inox AISI 304

Stainless steel AISI 304

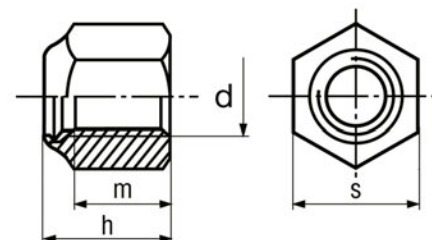

d	Passo	s	h	m	Codice	
mm	mm	mm	mm	mm	Item code	pz
M3	0,5	5,5	4,4	2,4	2300600	1.000
M4	0,7	7,0	6,0	3,2	1475700	200
M5	0,8	8,0	6,3	4,0	1475800	200
M6	1	10,0	8,0	5,0	1475900	200
M8	1,25	13,0	9,5	6,5	1476000	200
M10	1,5	17,0	11,5	8,0	1476100	100
M12	1,75	19,0	14,0	10,0	1476200	50
M14	2	22,0	16,0	12,0	1476300	50
M16	2	24,0	18,0	14,0	1476400	50

Dado esagonale autobloccante

UNI 7474 - DIN 985 - ISO 10511

Prevailing torque type hexagon nut

DEAB



Con inserto non metallico - Tipo basso

With non-metal insert - Low type

Filettatura metrica ISO a passo grosso


ISO metric thread coarse pitch

Acciaio cl.8

Steel cl.8 grade

Zincato bianco

White zinc plated

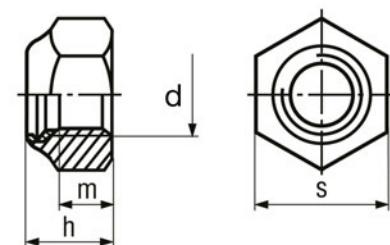

d	Passo	s	h	m	Codice	
mm	mm	mm	mm	mm	Item code	pz
M3	0,5	5,5	4,0	2,4	07669ZB	10.000
M4	0,7	7,0	5,0	2,9	07670ZB	2.500
M5	0,8	8,0	5,0	3,2	07671ZB	2.000
M6	1	10,0	6,0	4,0	07672ZB	500
M8	1,25	13,0	8,0	5,5	07674ZB	1.000
M10	1,5	17,0	10,0	6,5	07675ZB	500
M12	1,75	19,0	12,0	8,0	07676ZB	250
M14	2	22,0	14,0	9,5	07677ZB	150
M16	2	24,0	16,0	10,5	07678ZB	100

Dado esagonale autobloccante

UNI 7474 - DIN 985 - ISO 10511

Prevailing torque type hexagon nut

DEAB



Con inserto non metallico - Tipo basso


With non-metal insert - Low type

Filettatura metrica ISO a passo grosso

ISO metric thread coarse pitch

Acciaio Inox AISI 304

Stainless steel AISI 304

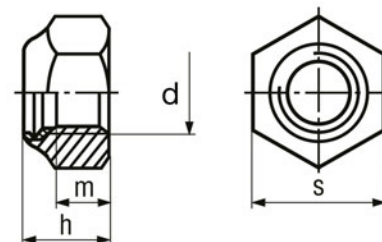

d	Passo	s	h	m	Codice	
mm	mm	mm	mm	mm	Item code	pz
M3	0,5	5,5	4,0	2,4	1477100	1.000
M4	0,7	7,0	5,0	2,9	1477200	1.000
M5	0,8	8,0	5,0	3,2	1477300	1.000
M6	1	10,0	6,0	4,0	1477400	1.000
M8	1,25	13,0	8,0	5,5	1477500	500
M10	1,5	17,0	10,0	6,5	1477600	100
M12	1,75	19,0	12,0	8,0	1477700	100

Dado esagonale c/flangia zigrinata

DIN 6923 - ISO 4161

Hexagon flange nut w/serration

DEFZ



Filettatura metrica ISO a passo grosso


ISO metric thread fine pitch

Acciaio CL.8

Steel CL.8 grade

Zincato bianco

White zinc plated

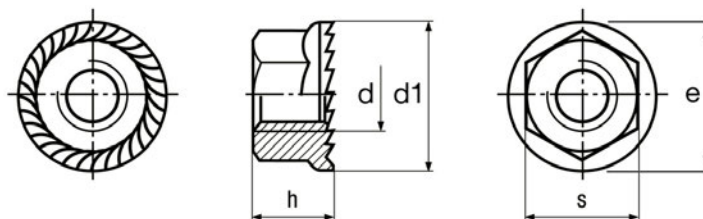

d	Passo	d1	h max	s	e min.	Codice	
mm	mm	mm	mm	mm	mm	Item code	pz
M3	0,5	8,0	4,0	5,5	6,01	12583ZB	2.000
M4	0,7	9,9	4,5	7,0	7,66	07584ZB	2.000
M5	0,8	11,8	5,0	8,0	8,79	07585ZB	2.500
M6	1	14,2	6,0	10,0	11,05	07586ZB	1.500
M8	1,25	17,9	8,0	13,0	14,38	07587ZB	500
M10	1,5	21,8	10,0	15,0	16,64	07588ZB	250
M10	1,5	21,8	10,0	17,0	18,86	29859ZB	250
M12	1,75	26,0	12,0	18,0	20,03	16474ZB	200
M14	2	29,9	14,0	21,0	23,36	50042ZB	100
M16	2	34,5	16,0	24,0	26,75	51493ZB	100

Dado esagonale c/flangia zigrinata

DIN 6923 - ISO 4161

Hexagon flange nut w/serration

DEFZ




Filettatura metrica ISO a passo grosso

ISO metric thread fine pitch

Acciaio Inox AISI 304

Stainless steel AISI 304

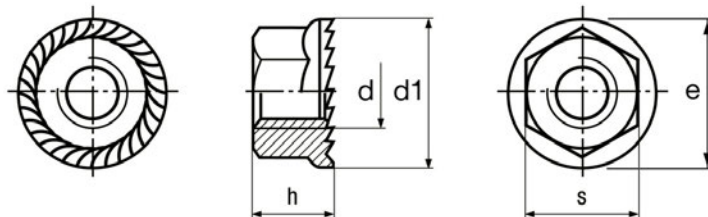

d	Passo	d1	h max	s	e min.	Codice	
mm	mm	mm	mm	mm	mm	Item code	pz
M3	0,5	8,0	4,0	5,5	5,99	5139300	1.000
M4	0,7	9,9	4,5	7,0	7,66	3085100	500
M5	0,8	11,8	5,0	8,0	8,79	1525500	1.000
M6	1	14,2	6,0	10,0	11,05	1889900	1.000
M8	1,25	17,9	8,0	13,0	14,38	2369700	200
M10	1,5	21,8	10,0	15,0	16,64	2262600	200
M12	1,75	26,0	12,0	18,0	20,03	4669600	100

Vite a saldare

FIAT 10453

Welding screw

VSP

Filettatura metrica ISO a passo grosso/fine*


ISO metric thread coarse/fine pitch*

Acciaio R50

Steel R50

Grezzo

Plain

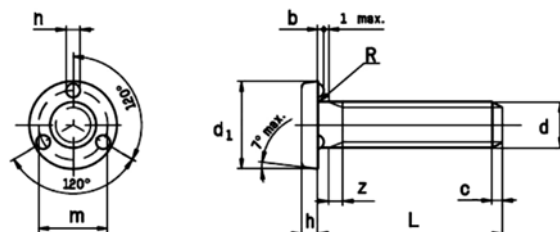

d	L	Passo	d1	h	m	z	c	Codice	
mm	mm	Thread	mm	mm	mm	mm	mm	Item code	pz
M5	12,0	0,8	13,00	2,50	9,50	2,00	1,50	1792000	1.000
M6	14,0	1	14,00	2,50	10,50	2,50	1,80	1243600	500
M6	16,0	1	14,00	2,50	10,50	2,50	1,80	0369900	500
M6	20,0	1	14,00	2,50	10,50	2,50	1,80	1792800	500
M6	30,0	1	14,00	2,50	10,50	2,50	1,80	1793100	250
M6	40,0	1	14,00	2,50	10,50	2,50	1,80	1793300	100
M8	16,0	1,25	17,00	3,50	13,00	3,10	2,20	1793900	250
M8	20,0	1,25	17,00	3,50	13,00	3,10	2,20	1684700	250
M8	25,0	1,25	17,00	3,50	13,00	3,10	2,20	0415600	200
M8	50,0	1,25	17,00	3,50	13,00	3,10	2,20	1794600	500
M10	20,0	1,25	19,00	3,50	15,00	3,1	2,20	1794900	800

Dado esagonale a saldare

DIN 929

Hexagon weld nut


DES

Filettatura metrica ISO a passo grosso

ISO metric thread coarse pitch

Acciaio CL.8
Steel CL.8 grade

Grezzo
Plain

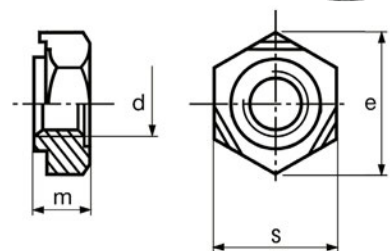

d	Passo	s	m	e	Codice	
mm	mm	mm	mm	min	Item code	pz
M4	0,7	9,0	3,5	9,83	0755100	4.000
M5	0,8	10,0	4,0	10,95	0755200	2.000
M6	1	11,0	5,0	12,02	0755300	2.000
M8	1,25	14,0	6,5	15,38	0755600	1.000
M10	1,5	17,0	8,0	18,74	0755800	500
M12	1,75	19,0	10,0	20,91	0755900	250
M14	2	22,0	11,0	24,27	1684200	250
M16	2	24,0	13,0	26,51	3238500	100

Vite testa cilindrica a croce PH

UNI 7687 - DIN 7985 - ISO 7045

PH pan head screw


TC+

Filettatura metrica ISO a passo grosso

ISO metric thread coarse pitch

Acciaio 4.8
Steel 4.8 grade

Zincato bianco
White zinc plated

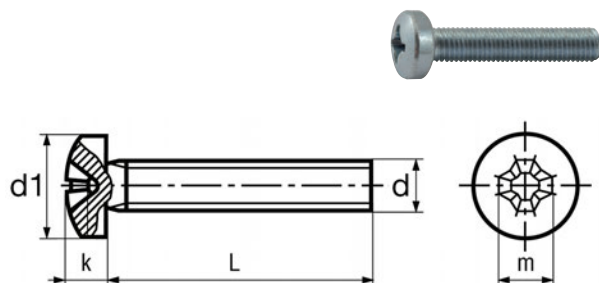

d	L	Passo	d1	k	PH	Codice	
mm	mm	Thread	mm	mm	mm	Item code	pz
M3	4,0	0,5	6,00	2,40	1	21145ZB	1.000
M3	5,0	0,5	6,00	2,40	1	21146ZB	1.000
M3	6,0	0,5	6,00	2,40	1	20959ZB	1.000
M3	8,0	0,5	6,00	2,40	1	21147ZB	1.000
M3	10,0	0,5	6,00	2,40	1	21148ZB	1.000
M3	14,0	0,5	6,00	2,40	1	20960ZB	1.000
M3	16,0	0,5	6,00	2,40	1	20962ZB	1.000
M3	25,0	0,5	6,00	2,40	1	20966ZB	1.000
M3	40,0	0,5	6,00	2,40	1	20956ZB	1.000
M4	6,0	0,7	8,00	3,10	2	20970ZB	1.000
M4	8,0	0,7	8,00	3,10	2	20971ZB	1.000
M4	10,0	0,7	8,00	3,10	2	20972ZB	1.000
M4	12,0	0,7	8,00	3,10	2	20973ZB	1.000
M4	14,0	0,7	8,00	3,10	2	20974ZB	1.000
M4	16,0	0,7	8,00	3,10	2	20975ZB	1.000
M4	20,0	0,7	8,00	3,10	2	20976ZB	1.000
M4	22,0	0,7	8,00	3,10	2	20977ZB	1.000

Vite testa cilindrica a croce PH

UNI 7687 - DIN 7985 - ISO 7045

PH pan head screw

TC+

Filettatura metrica ISO a passo grosso


ISO metric thread coarse pitch

Acciaio 4.8

Steel 4.8 grade

Zincato bianco

White zinc plated

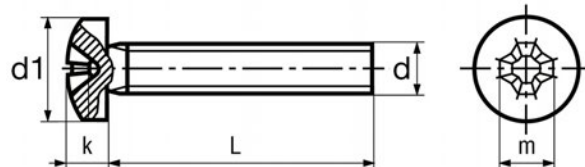

d	L	Passo	d1	k	PH	Codice	
mm	mm	Thread	mm	mm	mm	Item code	pz
M4	30,0	0,7	8,00	3,10	2	20979ZB	500
M4	50,0	0,7	8,00	3,10	2	20983ZB	500
M4	60,0	0,7	8,00	3,10	2	20984ZB	200
M5	16,0	0,8	10,00	3,80	2	20990ZB	500
M5	20,0	0,8	10,00	3,80	2	20992ZB	500
M5	35,0	0,8	10,00	3,80	2	20995ZB	200
M6	8,0	1	12,00	4,60	3	21000ZB	500
M6	10,0	1	12,00	4,60	3	21001ZB	500
M6	14,0	1	12,00	4,60	3	21003ZB	500
M6	16,0	1	12,00	4,60	3	21004ZB	500
M6	20,0	1	12,00	4,60	3	21005ZB	500

Acciaio Inox AISI 304

Stainless steel AISI 304

M2,5	8,0	0,45	5,00	2,00	1	1417700	1.000
M2,5	10,0	0,45	5,00	2,00	1	1417800	1.000
M2,5	12,0	0,45	5,00	2,00	1	1417900	1.000
M3	6,0	0,5	6,00	2,40	1	1418200	1.000
M3	8,0	0,5	6,00	2,40	1	1418300	1.000
M3	10,0	0,5	6,00	2,40	1	1418400	1.000
M3	12,0	0,5	6,00	2,40	1	1418500	1.000
M3	16,0	0,5	6,00	2,40	1	1418700	1.000
M3	20,0	0,5	6,00	2,40	1	1418800	500
M4	8,0	0,7	8,00	3,10	2	1419200	500
M4	10,0	0,7	8,00	3,10	2	1419300	1.000
M4	12,0	0,7	8,00	3,10	2	1419400	1.000
M4	14,0	0,7	8,00	3,10	2	1419500	1.000
M4	16,0	0,7	8,00	3,10	2	1419600	1.000
M4	18,0	0,7	8,00	3,10	2	1419700	500
M4	20,0	0,7	8,00	3,10	2	1419800	1.000
M4	25,0	0,7	8,00	3,10	2	1419900	500
M4	30,0	0,7	8,00	3,10	2	1420000	500
M5	6,0	0,8	10,00	3,80	2	1420500	500
M5	8,0	0,8	10,00	3,80	2	1420600	500
M5	10,0	0,8	10,00	3,80	2	1420700	500
M5	12,0	0,8	10,00	3,80	2	1420800	500
M5	14,0	0,8	10,00	3,80	2	1420900	500
M5	16,0	0,8	10,00	3,80	2	1421000	500
M5	20,0	0,8	10,00	3,80	2	1421200	500
M6	16,0	1	12,00	4,60	3	1422300	500
M6	20,0	1	12,00	4,60	3	1422400	500
M6	25,0	1	12,00	4,60	3	1422500	200
M6	30,0	1	12,00	4,60	3	1422600	200
M6	40,0	1	12,00	4,60	3	1422800	200

Vite testa svasata piana a croce PH

UNI 7688 - DIN 965 - ISO 7046

PH countersunk head screw

TSP+

Filettatura metrica ISO a passo grosso


ISO metric thread coarse pitch

Acciaio 4.8

Steel 4.8 grade

Zincato bianco

White zinc plated

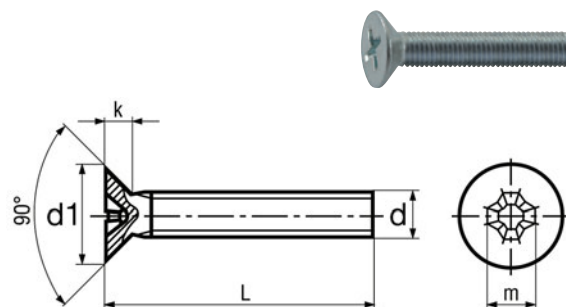

d	L	Passo	d1	k	PH	Codice	
mm	mm	Thread	mm	mm	mm	Item code	pz
M3	6,0	0,5	5,60	1,65	1	21021ZB	1.000
M3	8,0	0,5	5,60	1,65	1	21022ZB	1.000
M3	10,0	0,5	5,60	1,65	1	21023ZB	1.000
M3	12,0	0,5	5,60	1,65	1	21024ZB	1.000
M4	6,0	0,7	7,50	2,20	2	21031ZB	1.000
M4	8,0	0,7	7,50	2,20	2	21032ZB	1.000
M4	10,0	0,7	7,50	2,20	2	21033ZB	1.000
M4	12,0	0,7	7,50	2,20	2	21034ZB	1.000
M4	14,0	0,7	7,50	2,20	2	21035ZB	1.000
M4	16,0	0,7	7,50	2,20	2	21036ZB	1.000
M4	20,0	0,7	7,50	2,20	2	21038ZB	1.000
M4	25,0	0,7	7,50	2,20	2	21039ZB	500
M4	30,0	0,7	7,50	2,20	2	21040ZB	1.000
M4	35,0	0,7	7,50	2,20	2	21041ZB	500
M5	10,0	0,8	9,20	2,50	2	21047ZB	1.000
M5	12,0	0,8	9,20	2,50	2	21048ZB	1.000
M5	14,0	0,8	9,20	2,50	2	21049ZB	1.000
M5	16,0	0,8	9,20	2,50	2	21050ZB	500
M5	20,0	0,8	9,20	2,50	2	21052ZB	500
M5	30,0	0,8	9,20	2,50	2	21054ZB	200
M6	12,0	1	11,00	3,00	3	21060ZB	500
M6	16,0	1	11,00	3,00	3	21062ZB	500
M6	18,0	1	11,00	3,00	3	21063ZB	500
M6	20,0	1	11,00	3,00	3	21064ZB	500
M6	25,0	1	11,00	3,00	3	21065ZB	200
M6	30,0	1	11,00	3,00	3	21066ZB	200
M6	35,0	1	11,00	3,00	3	21067ZB	200
M6	40,0	1	11,00	3,00	3	21068ZB	200

Vite testa svasata piana a croce PH

UNI 7688 - DIN 965 - ISO 7046

PH countersunk head screw


TSP+

Filettatura metrica ISO a passo grosso

ISO metric thread coarse pitch

Acciaio Inox AISI 304

Stainless steel AISI 304

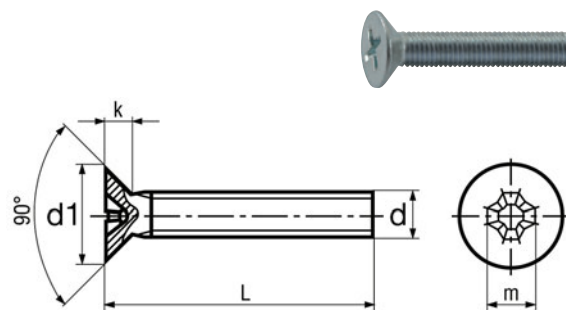

d	L	Passo	d1	k	PH	Codice	
mm	mm	Thread	mm	mm	mm	Item code	pz
M2,5	8,0	0,45	4,70	1,50	1	0515700	1.000
M2,5	10,0	0,45	4,70	1,50	1	1425400	1.000
M2,5	12,0	0,45	4,70	1,50	1	1425500	1.000
M3	6,0	0,5	5,60	1,65	1	1425900	1.000
M3	8,0	0,5	5,60	1,65	1	1426000	1.000
M3	10,0	0,5	5,60	1,65	1	1426100	1.000
M3	12,0	0,5	5,60	1,65	1	1426200	500
M3	14,0	0,5	5,60	1,65	1	1426300	500
M3	16,0	0,5	5,60	1,65	1	1426400	500
M3	20,0	0,5	5,60	1,65	1	1426500	1.000
M4	8,0	0,7	7,50	2,20	2	1426900	1.000
M4	10,0	0,7	7,50	2,20	2	1427000	1.000
M4	12,0	0,7	7,50	2,20	2	1427100	1.000
M4	14,0	0,7	7,50	2,20	2	1427200	1.000
M4	16,0	0,7	7,50	2,20	2	1427300	500
M4	20,0	0,7	7,50	2,20	2	1427400	1.000
M4	25,0	0,7	7,50	2,20	2	1427500	500
M4	30,0	0,7	7,50	2,20	2	1427600	500
M4	35,0	0,7	7,50	2,20	2	1427700	500
M4	40,0	0,7	7,50	2,20	2	1427800	500
M4	45,0	0,7	7,50	2,20	2	1427900	500
M4	50,0	0,7	7,50	2,20	2	1428000	500
M5	10,0	0,8	9,20	2,50	2	1428300	500
M5	12,0	0,8	9,20	2,50	2	1428400	500
M5	14,0	0,8	9,20	2,50	2	1428500	500
M5	16,0	0,8	9,20	2,50	2	1428600	500
M5	20,0	0,8	9,20	2,50	2	1428700	500
M5	30,0	0,8	9,20	2,50	2	1428900	500
M6	12,0	1	11,00	3,00	3	1429600	500
M6	14,0	1	11,00	3,00	3	1429700	500
M6	16,0	1	11,00	3,00	3	1429800	500
M6	20,0	1	11,00	3,00	3	1429900	250
M6	25,0	1	11,00	3,00	3	1430000	200
M6	30,0	1	11,00	3,00	3	1430100	200

Barra filettata

DIN 975/976

Threaded rod

BF

Lunghezza 1 metro

1 meter length

Filettatura metrica ISO a passo grosso



ISO metric thread coarse pitch

Acciaio 4.8

Steel 4.8 grade

Zincato bianco

White zinc plated

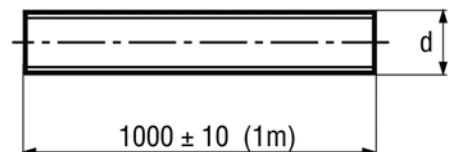

d	Passo	L	Codice	
mm	mm	mm	Item code	pz
M3	0,5	1000,0	21316ZB	1
M4	0,7	1000,0	21317ZB	1
M5	0,8	1000,0	21318ZB	1
M6	1	1000,0	21319ZB	1
M8	1,25	1000,0	21321ZB	1
M10	1,5	1000,0	21323ZB	1
M12	1,75	1000,0	21325ZB	1
M14	2	1000,0	21327ZB	1
M16	2	1000,0	21328ZB	1
M18	2,5	1000,0	21329ZB	1
M20	2,5	1000,0	21330ZB	1
M22	2,5	1000,0	21331ZB	1

Acciaio 8.8

Steel 8.8 grade

M6	1	1000,0	32110ZB	1
M8	1,25	1000,0	32111ZB	1
M10	1,5	1000,0	22131ZB	1
M12	1,75	1000,0	33583ZB	1
M14	2	1000,0	22916ZB	1
M16	2	1000,0	04179ZB	1
M18	2,5	1000,0	22904ZB	1
M20	2,5	1000,0	21374ZB	1
M22	2,5	1000,0	28229ZB	1
M24	3	1000,0	21370ZB	1

Acciaio Inox AISI 304

Stainless steel AISI 304

M6	1	1000,0	1472000	1
M8	1,25	1000,0	1472200	1
M10	1,5	1000,0	1472300	1
M12	1,75	1000,0	1472500	1
M14	2	1000,0	1472600	1
M16	2	1000,0	1472700	1

Autofilettante testa cilindrica croce PH


UNI 6954 - DIN 7981C - ISO 7049

PH pan head self tapping screw

ATC+

Acciaio C15
Carbon Steel C15

Zincato bianco
White zinc plated

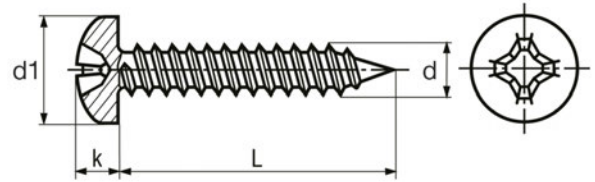

d	L	Passo	d1	k	r1	r2	PH	Codice	
mm	mm	Thread	mm	mm	mm	mm	mm	Item code	pz
2,2	4,5	0,8	4,20	1,80	0,30	3,40	1	50732ZB	2.000
2,2	6,5	0,8	4,20	1,80	0,30	3,40	1	01090ZB	2.000
2,2	9,5	0,8	4,20	1,80	0,30	3,40	1	08882ZB	2.000
2,2	13,0	0,8	4,20	1,80	0,30	3,40	1	33489ZB	1.000
2,9	6,5	1,1	5,60	2,20	0,40	4,40	1	12978ZB	2.000
2,9	9,5	1,1	5,60	2,20	0,40	4,40	1	12979ZB	1.000
2,9	13,0	1,1	5,60	2,20	0,40	4,40	1	15572ZB	1.000
2,9	16,0	1,1	5,60	2,20	0,40	4,40	1	08895ZB	1.000
2,9	19,0	1,1	5,60	2,20	0,40	4,40	1	18778ZB	1.000
3,5	6,5	1,3	6,90	2,60	0,50	5,40	2	00775ZB	1.000
3,5	9,5	1,3	6,90	2,60	0,50	5,40	2	10972ZB	1.000
3,5	13,0	1,3	6,90	2,60	0,50	5,40	2	10747ZB	2.000
3,5	16,0	1,3	6,90	2,60	0,50	5,40	2	11164ZB	1.000
3,5	19,0	1,3	6,90	2,60	0,50	5,40	2	10746ZB	1.000
3,5	38,0	1,3	6,90	2,60	0,50	5,40	2	23408ZB	500
3,9	6,5	1,3	7,50	2,80	0,50	5,80	2	12977ZB	1.000
3,9	9,5	1,3	7,50	2,80	0,50	5,80	2	08916ZB	1.000
3,9	13,0	1,3	7,50	2,80	0,50	5,80	2	08918ZB	1.000
3,9	16,0	1,3	7,50	2,80	0,50	5,80	2	08920ZB	1.000
3,9	19,0	1,3	7,50	2,80	0,50	5,80	2	10743ZB	1.000
4,2	9,5	1,4	8,20	3,05	0,60	6,20	2	08934ZB	1.000
4,2	13,0	1,4	8,20	3,05	0,60	6,20	2	08936ZB	1.000
4,2	16,0	1,4	8,20	3,05	0,60	6,20	2	00694ZB	1.000
4,2	19,0	1,4	8,20	3,05	0,60	6,20	2	15874ZB	1.000
4,2	22,0	1,4	8,20	3,05	0,60	6,20	2	02155ZB	1.000
4,2	25,0	1,4	8,20	3,05	0,60	6,20	2	12469ZB	1.000
4,8	13,0	1,6	9,50	3,55	0,70	7,20	2	08949ZB	1.000
4,8	16,0	1,6	9,50	3,55	0,70	7,20	2	08952ZB	1.000
4,8	19,0	1,6	9,50	3,55	0,70	7,20	2	15217ZB	500
4,8	22,0	1,6	9,50	3,55	0,70	7,20	2	15662ZB	500
4,8	25,0	1,6	9,50	3,55	0,70	7,20	2	04163ZB	500
4,8	32,0	1,6	9,50	3,55	0,70	7,20	2	08960ZB	500
4,8	38,0	1,6	9,50	3,55	0,70	7,20	2	08962ZB	500
4,8	45,0	1,6	9,50	3,55	0,70	7,20	2	08964ZB	200
4,8	50,0	1,6	9,50	3,55	0,70	7,20	2	11103ZB	200
4,8	60,0	1,6	9,50	3,55	0,70	7,20	2	19133ZB	200
4,8	70/60	1,6	9,50	3,55	0,70	7,20	2	41214ZB	200
4,8	70/70	1,6	9,50	3,55	0,70	7,20	2	19134ZB	200
4,8	80/60	1,6	9,50	3,55	0,70	7,20	2	19137ZB	200
5,5	38,0	1,8	10,80	3,95	0,80	8,20	3	12285ZB	200

Zincato Nero

Black zinc plated

3,9	16,0	1,3	7,50	2,80	0,50	5,80	2	08920ZN	1.000
3,9	32,0	1,3	7,50	2,80	0,50	5,80	2	08927ZN	500
4,2	16,0	1,4	8,20	3,05	0,60	6,20	2	00694ZN	1.000




Autofilettante testa cilindrica croce PH

UNI 6954 - DIN 7981C - ISO 7049

PH pan head self tapping screw

ATC+

Acciaio Inox AISI 304
Stainless steel AISI 304

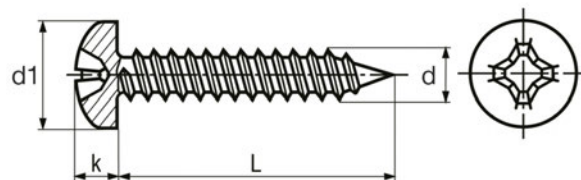

d	L	Passo	d1	k	r1	r2	PH	Codice	
mm	mm	Thread	mm	mm	mm	mm	mm	Item code	pz
2,9	9,5	1,1	5,60	2,20	0,40	4,40	1	1397700	1.000
2,9	13,0	1,1	5,60	2,20	0,40	4,40	1	1397800	1.000
2,9	16,0	1,1	5,60	2,20	0,40	4,40	1	1397900	1.000
3,5	9,5	1,3	6,90	2,60	0,50	5,40	2	1398600	1.000
3,5	13,0	1,3	6,90	2,60	0,50	5,40	2	1398700	1.000
3,5	16,0	1,3	6,90	2,60	0,50	5,40	2	1398800	1.000
3,5	19,0	1,3	6,90	2,60	0,50	5,40	2	1398900	1.000
3,9	9,5	1,3	7,50	2,80	0,50	5,80	2	1399400	1.000
3,9	13,0	1,3	7,50	2,80	0,50	5,80	2	1399500	1.000
3,9	16,0	1,3	7,50	2,80	0,50	5,80	2	1399600	1.000
3,9	19,0	1,3	7,50	2,80	0,50	5,80	2	1399700	1.000
3,9	25,0	1,3	7,50	2,80	0,50	5,80	2	1399900	1.000
3,9	38,0	1,3	7,50	2,80	0,50	5,80	2	1400100	500
4,2	9,5	1,4	8,20	3,05	0,60	6,20	2	1400400	1.000
4,2	13,0	1,4	8,20	3,05	0,60	6,20	2	1400500	1.000
4,2	16,0	1,4	8,20	3,05	0,60	6,20	2	1400600	1.000
4,2	19,0	1,4	8,20	3,05	0,60	6,20	2	1400700	1.000
4,2	22,0	1,4	8,20	3,05	0,60	6,20	2	1400800	1.000
4,2	25,0	1,4	8,20	3,05	0,60	6,20	2	1400900	1.000
4,8	13,0	1,6	9,50	3,55	0,70	7,20	2	1401600	1.000
4,8	16,0	1,6	9,50	3,55	0,70	7,20	2	1401700	1.000
4,8	19,0	1,6	9,50	3,55	0,70	7,20	2	1401800	1.000
4,8	22,0	1,6	9,50	3,55	0,70	7,20	2	1401900	1.000
4,8	25,0	1,6	9,50	3,55	0,70	7,20	2	1402000	500
4,8	32,0	1,6	9,50	3,55	0,70	7,20	2	1402100	500
4,8	38,0	1,6	9,50	3,55	0,70	7,20	2	1402200	500

Autofilettante testa svasata croce PH


UNI 6955 - DIN 7982C - ISO 7050

PH countersunk head self tapping screw

ASP+

Acciaio C15
Carbon Steel C15

Zincato bianco
White zinc plated

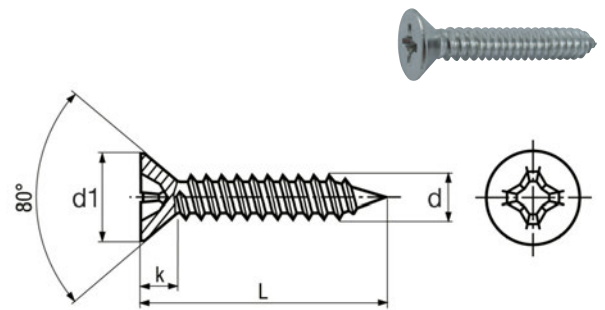

d	L	Passo	d1	k	r	PH	Codice	
mm	mm	Thread	mm	mm	mm	mm	Item code	pz
2,9	9,5	1,1	5,50	1,70	1,10	1	08874ZB	1.000
2,9	13,0	1,1	5,50	1,70	1,10	1	11610ZB	1.000
2,9	16,0	1,1	5,50	1,70	1,10	1	00788ZB	1.500
3,5	9,5	1,3	6,80	2,10	1,40	2	08998ZB	1.000
3,5	13,0	1,3	6,80	2,10	1,40	2	09001ZB	2.000
3,5	16,0	1,3	6,80	2,10	1,40	2	09003ZB	1.000
3,5	19,0	1,3	6,80	2,10	1,40	2	09005ZB	1.000
3,5	22,0	1,3	6,80	2,10	1,40	2	04375ZB	1.000
3,5	25,0	1,3	6,80	2,10	1,40	2	09009ZB	1.000
3,5	32,0	1,3	6,80	2,10	1,40	2	09142ZB	500
3,9	9,5	1,3	7,50	2,30	1,50	2	00187ZB	1.000
3,9	13,0	1,3	7,50	2,30	1,50	2	09016ZB	1.000
3,9	16,0	1,3	7,50	2,30	1,50	2	15237ZB	1.000
3,9	19,0	1,3	7,50	2,30	1,50	2	05767ZB	1.000
4,2	9,5	1,4	8,10	2,50	1,60	2	09028ZB	1.000
4,2	13,0	1,4	8,10	2,50	1,60	2	00992ZB	1.000
4,2	16,0	1,4	8,10	2,50	1,60	2	03137ZB	1.000
4,2	19,0	1,4	8,10	2,50	1,60	2	09032ZB	1.000
4,8	25,0	1,6	9,50	3,00	1,90	2	05806ZB	500
4,8	32,0	1,6	9,50	3,00	1,90	2	00773ZB	500

Zincato Nero
Black zinc plated

3,9	9,5	1,3	7,50	2,30	1,50	2	00187ZN	1.000
3,9	13,0	1,3	7,50	2,30	1,50	2	09016ZN	1.000
3,9	16,0	1,3	7,50	2,30	1,50	2	15237ZN	1.000
3,9	19,0	1,3	7,50	2,30	1,50	2	05767ZN	1.000
4,2	25,0	1,4	8,10	2,50	1,60	2	04846ZN	1.000

Acciaio Inox AISI 304
Stainless steel AISI 304

2,2	9,5	0,8	4,30	1,30	0,80	1	0058700	1.000
2,9	13,0	1,1	5,50	1,70	1,10	1	1405200	1.000
3,5	13,0	1,3	6,80	2,10	1,40	2	1405900	1.000
3,5	16,0	1,3	6,80	2,10	1,40	2	1406000	1.000
3,5	19,0	1,3	6,80	2,10	1,40	2	1406100	1.000
3,5	22,0	1,3	6,80	2,10	1,40	2	1406200	1.000
3,5	25,0	1,3	6,80	2,10	1,40	2	1406300	1.000
3,5	32,0	1,3	6,80	2,10	1,40	2	1406400	1.000
3,9	13,0	1,3	7,50	2,30	1,50	2	1406700	1.000
3,9	16,0	1,3	7,50	2,30	1,50	2	1406800	1.000
3,9	19,0	1,3	7,50	2,30	1,50	2	1406900	1.000
3,9	22,0	1,3	7,50	2,30	1,50	2	1407000	1.000
3,9	25,0	1,3	7,50	2,30	1,50	2	1407100	1.000


Autofilettante testa svasata croce PH

UNI 6955 - DIN 7982C - ISO 7050

PH countersunk head self tapping screw

ASP+

Acciaio Inox AISI 304
Stainless steel AISI 304

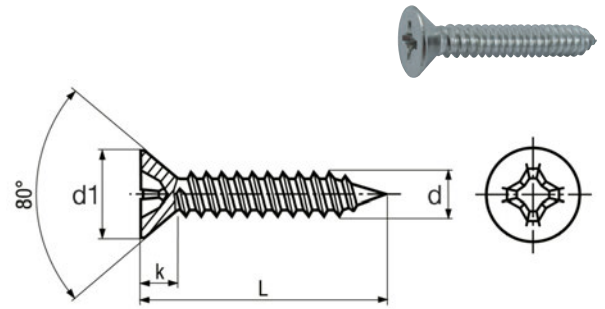

d	L	Passo	d1	k	r	PH	Codice	
mm	mm	Thread	mm	mm	mm	mm	Item code	pz
3,9	32,0	1,3	7,50	2,30	1,50	2	1407200	1.000
3,9	38,0	1,3	7,50	2,30	1,50	2	1407300	500
4,2	9,5	1,4	8,10	2,50	1,60	2	1407400	1.000
4,2	13,0	1,4	8,10	2,50	1,60	2	1407500	1.000
4,2	16,0	1,4	8,10	2,50	1,60	2	1407600	1.000
4,2	19,0	1,4	8,10	2,50	1,60	2	1407700	1.000
4,2	22,0	1,4	8,10	2,50	1,60	2	1407800	1.000
4,2	25,0	1,4	8,10	2,50	1,60	2	1407900	1.000
4,2	32,0	1,4	8,10	2,50	1,60	2	1408000	500
4,2	38,0	1,4	8,10	2,50	1,60	2	1408100	500
4,8	13,0	1,6	9,50	3,00	1,90	2	1408400	1.000
4,8	16,0	1,6	9,50	3,00	1,90	2	1408500	1.000
4,8	19,0	1,6	9,50	3,00	1,90	2	1408600	1.000
4,8	25,0	1,6	9,50	3,00	1,90	2	1408800	500
4,8	32,0	1,6	9,50	3,00	1,90	2	1408900	500
4,8	38,0	1,6	9,50	3,00	1,90	2	1409000	500
4,8	50,0	1,6	9,50	3,00	1,90	2	1409200	200
4,8	60,0	1,6	9,50	3,00	1,90	2	1409300	200
4,8	70,0	1,6	9,50	3,00	1,90	2	1667000	200

Autofilettante testa cilindrica cava esagonale


UNI 6947 - DIN 912

Hexagon socket head cap self-tapping screw

ATCEI

Acciaio C15
Carbon Steel C15

Zincato bianco
White zinc plated

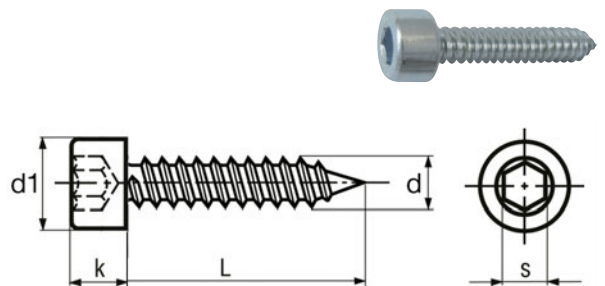

d	L	Passo	d1	k	s	Codice	
mm	mm	Thread	mm	mm	mm	Item code	pz
4,8	25,0	1,8	10,00	6,00	5	06189ZB	500
4,8	32,0	1,8	10,00	6,00	5	61693ZB	500
4,8	38,0	1,8	10,00	6,00	5	06191ZB	500
4,8	50,0	1,8	10,00	6,00	5	06193ZB	200

Perforante testa cilindrica croce PH


UNI 8118 - DIN 7504N - ISO 15481

PH pan head self-drilling screw

PTC+

Acciaio C15
Carbon Steel C15

Zincato bianco
White zinc plated

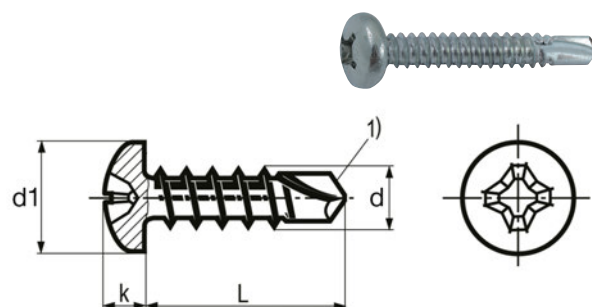

d	L	Passo	d1	k	PH	Codice	
mm	mm	Thread	mm	mm	mm	Item code	pz
3,5	9,5	1,3	6,90	2,60	2	04884ZB	1.000
3,5	13,0	1,3	6,90	2,60	2	04885ZB	1.000
3,5	16,0	1,3	6,90	2,60	2	04886ZB	1.000
3,5	19,0	1,3	6,90	2,60	2	04887ZB	1.000
3,5	22,0	1,3	6,90	2,60	2	04888ZB	1.000
3,9	9,5	1,3	7,50	2,80	2	11118ZB	1.000
3,9	13,0	1,3	7,50	2,80	2	04890ZB	1.000
3,9	16,0	1,3	7,50	2,80	2	04891ZB	1.000
3,9	19,0	1,3	7,50	2,80	2	04892ZB	1.000
3,9	22,0	1,3	7,50	2,80	2	04893ZB	1.000
3,9	25,0	1,3	7,50	2,80	2	04894ZB	1.000
3,9	32,0	1,3	7,50	2,80	2	04895ZB	500
3,9	38,0	1,3	7,50	2,80	2	34646ZB	500
4,2	9,5	1,4	8,20	3,05	2	04896ZB	1.000
4,2	13,0	1,4	8,20	3,05	2	04842ZB	1.000
4,2	16,0	1,4	8,20	3,05	2	04898ZB	1.000
4,2	19,0	1,4	8,20	3,05	2	04838ZB	1.000
4,2	22,0	1,4	8,20	3,05	2	04901ZB	1.000
4,2	25,0	1,4	8,20	3,05	2	04902ZB	1.000
4,2	32,0	1,4	8,20	3,05	2	04903ZB	500
4,8	16,0	1,6	9,50	3,55	2	04905ZB	1.000
4,8	19,0	1,6	9,50	3,55	2	04906ZB	1.000
4,8	22,0	1,6	9,50	3,55	2	04907ZB	500
4,8	25,0	1,6	9,50	3,55	2	04908ZB	500
4,8	32,0	1,6	9,50	3,55	2	04909ZB	500
4,8	38,0	1,6	9,50	3,55	2	04910ZB	3.000
4,8	45,0	1,6	9,50	3,55	2	04911ZB	250
4,8	50,0	1,6	9,50	3,55	2	04912ZB	200
4,8	60,0	1,6	9,50	3,55	2	24475ZB	200
6,3	50,0	1,8	12,50	4,55	3	27296ZB	200

Perforante testa svasata croce PH


UNI 8119 - DIN 7504P - ISO 15482

PH countersunk head self-drilling screw

PSP+

Acciaio C15
Carbon Steel C15

Zincato bianco
White zinc plated

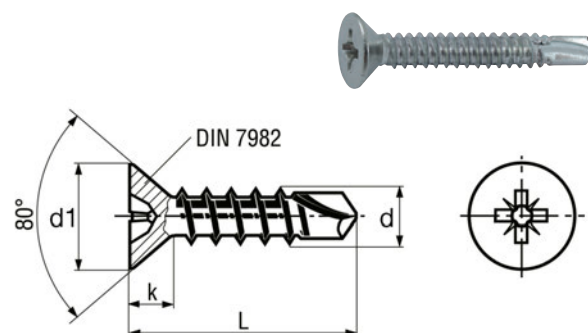

d	L	Passo	d1	k	PH	Codice	
mm	mm	Thread	mm	mm	mm	Item code	pz
3,5	9,5	1,3	6,80	2,10	2	04923ZB	1.000
3,5	13,0	1,3	6,80	2,10	2	04924ZB	1.000
3,5	16,0	1,3	6,80	2,10	2	04925ZB	1.000
3,5	19,0	1,3	6,80	2,10	2	04926ZB	1.000
3,5	22,0	1,3	6,80	2,10	2	04927ZB	1.000
3,9	16,0	1,3	7,50	2,30	2	04930ZB	1.000
3,9	19,0	1,3	7,50	2,30	2	04827ZB	1.000
3,9	22,0	1,3	7,50	2,30	2	04932ZB	1.000
3,9	25,0	1,3	7,50	2,30	2	05915ZB	1.000
3,9	32,0	1,3	7,50	2,30	2	04934ZB	500
3,9	38,0	1,3	7,50	2,30	2	05868ZB	500
3,9	45,0	1,3	7,50	2,30	2	43956ZB	500
4,2	16,0	1,4	8,10	2,50	2	04936ZB	1.000
4,2	19,0	1,4	8,10	2,50	2	04937ZB	1.000
4,2	22,0	1,4	8,10	2,50	2	04938ZB	1.000
4,2	25,0	1,4	8,10	2,50	2	04939ZB	1.000
4,2	32,0	1,4	8,10	2,50	2	04940ZB	500
4,2	38,0	1,4	8,10	2,50	2	17013ZB	500
4,2	50,0	1,4	8,10	2,50	2	43875ZB	500
4,8	19,0	1,6	9,50	3,00	2	04943ZB	500
4,8	22,0	1,6	9,50	3,00	2	04944ZB	500
4,8	25,0	1,6	9,50	3,00	2	04945ZB	500
4,8	32,0	1,6	9,50	3,00	2	04946ZB	500
4,8	38,0	1,6	9,50	3,00	2	04947ZB	500
4,8	45,0	1,6	9,50	3,00	2	04948ZB	200
4,8	50,0	1,6	9,50	3,00	2	04949ZB	200
4,8	60,0	1,6	9,50	3,00	2	34198ZB	200

Perforante testa svasata TX c/alette

DIN 7504P

Hexalobular countersunk head self-drilling screw w/fins

PSPAX

Con alette


With fins

Acciaio C15

Carbon Steel C15

Zincato bianco

White zinc plated

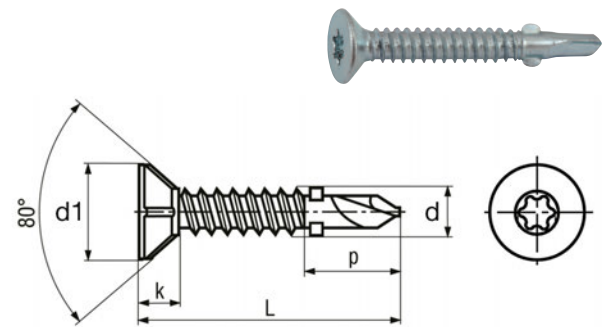

d	L	Ø	Passo	d1	k	PH	Codice	
mm	mm	mm	Thread	mm	mm	mm	Item code	pz
6,3	50,0	12	1,8	12,40	3,80	30	46254ZB	200
6,3	60,0	12	1,8	12,40	3,80	30	05014ZB	100
6,3	65,0	12	1,8	12,40	3,80	30	46253ZB	100
6,3	70,0	12	1,8	12,40	3,80	30	48495ZB	100
6,3	80,0	12	1,8	12,40	3,80	30	05017ZB	100

d	L	Ø	Passo	d1	k	PH	Codice	
mm	mm	mm	Thread	mm	mm	mm	Item code	pz
6,3	50,0	15	1,8	12,40	3,80	30	05020ZB	500
6,3	60,0	15	1,8	12,40	3,80	30	05022ZB	500
6,3	70,0	15	1,8	12,40	3,80	30	05024ZB	500


Perforante testa mezza tonda c/flangia croce PH

PH flange truss head self drilling screw

PBLF+

Acciaio C15
Carbon Steel C15

Zincato bianco
White zinc plated

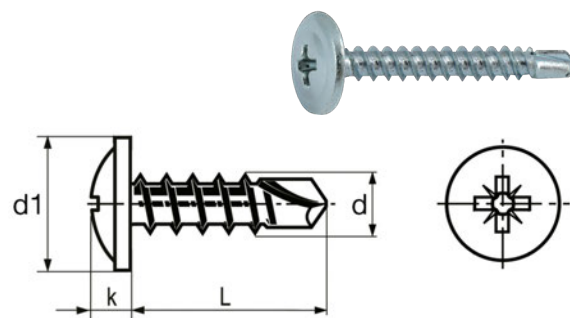

d	L	Passo	d1	k	PH	Codice	
mm	mm	Thread	mm	mm	mm	Item code	pz
4,2	13,0	1,4	11,20	2,50	2	04833ZB	1.000
4,2	16,0	1,4	11,20	2,50	2	29945ZB	1.000
4,2	19,0	1,4	11,20	2,50	2	04834ZB	1.000
4,2	22,0	1,4	11,20	2,50	2	47360ZB	1.000
4,2	25,0	1,4	11,20	2,50	2	22687ZB	500
4,2	32,0	1,4	11,20	2,50	2	04835ZB	500
4,2	38,0	1,4	11,20	2,50	2	04836ZB	500
4,8	16,0	1,6	12,80	2,50	2	33942ZB	1.000
4,8	19,0	1,6	12,80	2,50	2	41982ZB	500
4,8	22,0	1,6	12,80	2,50	2	48093ZB	500
4,8	25,0	1,6	12,80	2,50	2	42351ZB	500
4,8	32,0	1,6	12,80	2,50	2	41741ZB	500
4,8	38,0	1,6	12,80	2,50	2	33993ZB	500
4,8	45,0	1,6	12,80	2,50	2	25449ZB	200
4,8	50,0	1,6	12,80	2,50	2	25450ZB	200

Zincato nero
Black zinc plated

4,2	13,0	1,4	11,20	2,50	2	04833ZN	1.000
4,2	16,0	1,4	11,20	2,50	2	29945ZN	1.000
4,2	19,0	1,4	11,20	2,50	2	04834ZN	1.000
4,2	22,0	1,4	11,20	2,50	2	47360ZN	1.000
4,8	16,0	1,6	12,80	2,50	2	33942ZN	1.000
4,8	19,0	1,6	12,80	2,50	2	41982ZN	500
4,8	22,0	1,6	12,80	2,50	2	14594ZN	500

Perforante testa esagonale c/flangia

UNI 8117 - DIN 7504K - ISO 15480

Hexagonal flange head self-drilling screw

PTEF

Con flangia


With flange

Acciaio C15

Carbon Steel C15

Zincato bianco

White zinc plated

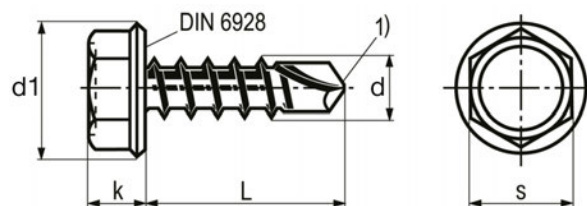

d	L	Passo	d1	k	s	Codice	
mm	mm	Thread	mm	min	mm	Item code	pz
4,2	13,0	1,41	8,80	4,00	7,00	04847ZB	1.000
4,2	16,0	1,41	8,80	4,00	7,00	04966ZB	1.000
4,2	19,0	1,41	8,80	4,00	7,00	04848ZB	1.000
4,2	22,0	1,41	8,80	4,00	7,00	15925ZB	1.000
4,2	25,0	1,41	8,80	4,00	7,00	10479ZB	1.000
4,2	32,0	1,41	8,80	4,00	7,00	09491ZB	500
4,8	13,0	1,59	10,50	4,15	8,00	10652ZB	1.000
4,8	16,0	1,59	10,50	4,15	8,00	04967ZB	1.000
4,8	19,0	1,59	10,50	4,15	8,00	04968ZB	500
4,8	22,0	1,59	10,50	4,15	8,00	15926ZB	500
4,8	25,0	1,59	10,50	4,15	8,00	04843ZB	500
4,8	32,0	1,59	10,50	4,15	8,00	04970ZB	500
4,8	38,0	1,59	10,50	4,15	8,00	04971ZB	500
4,8	45,0	1,59	10,50	4,15	8,00	04844ZB	200
4,8	50,0	1,59	10,50	4,15	8,00	02909ZB	200
4,8	60,0	1,59	10,50	4,15	8,00	60223ZB	200
6,3	19,0	1,81	13,20	6,15	10,00	04973ZB	500
6,3	22,0	1,81	13,20	6,15	10,00	04974ZB	500
6,3	25,0	1,81	13,20	6,15	10,00	04975ZB	250
6,3	32,0	1,81	13,20	6,15	10,00	19556ZB	200
6,3	38,0	1,81	13,20	6,15	10,00	04977ZB	200
6,3	45,0	1,81	13,20	6,15	10,00	04978ZB	100
6,3	50,0	1,81	13,20	6,15	10,00	04979ZB	200
6,3	60,0	1,81	13,20	6,15	10,00	04980ZB	100
6,3	70/60	1,81	13,20	6,15	10,00	04981ZB	100
6,3	80/60	1,81	13,20	6,15	10,00	16130ZB	100
6,3	90/60	1,81	13,20	6,15	10,00	04982ZB	200
6,3	100/70	1,81	13,20	6,15	10,00	55769ZB	100
6,3	110/70	1,81	13,20	6,15	10,00	16131ZB	100
6,3	120/70	1,81	13,20	6,15	10,00	54732ZB	100
6,3	130/70	1,81	13,20	6,15	10,00	16133ZB	100
6,3	140/70	1,81	13,20	6,15	10,00	16134ZB	100
6,3	160/70	1,81	13,20	6,15	10,00	16135ZB	100
6,3	180/70	1,81	13,20	6,15	10,00	41945ZB	100
6,3	200/70	1,81	13,20	6,15	10,00	54528ZB	100
6,3	220/70	1,81	13,20	6,15	10,00	48426ZB	100
6,3	240/70	1,81	13,20	6,15	10,00	54654ZB	100
6,3	260/70	1,81	13,20	6,15	10,00	63396ZB	50

Tirafondo testa esagonale

UNI 571 - DIN 704

Hexagon wood lag screw

CTE

Acciaio 4.8
Steel 4.8 grade

Zincato bianco
White zinc plated



d	L	Passo	s	e	k	Codice	
mm	mm	Thread	mm	mm	mm	Item code	pz
6,0	30,0	2,6	10,00	10,89	4,00	46075ZB	500
6,0	40,0	2,6	10,00	10,89	4,00	46977ZB	500
6,0	50,0	2,6	10,00	10,89	4,00	46978ZB	100
6,0	60,0	2,6	10,00	10,89	4,00	46076ZB	100
6,0	70,0	2,6	10,00	10,89	4,00	32390ZB	100
6,0	80,0	2,6	10,00	10,89	4,00	46979ZB	100
8,0	25,0	3,6	13,00	14,20	5,50	31150ZB	100
8,0	30,0	3,6	13,00	14,20	5,50	05074ZB	300
8,0	40,0	3,6	13,00	14,20	5,50	05075ZB	100
8,0	50,0	3,6	13,00	14,20	5,50	05076ZB	100
8,0	60,0	3,6	13,00	14,20	5,50	05077ZB	200
8,0	70,0	3,6	13,00	14,20	5,50	19112ZB	100
8,0	80,0	3,6	13,00	14,20	5,50	05078ZB	100

Tirafondo testa esagonale c/flangia


DIN 704

Hexagon flange head wood lag screw

CTEFL

Acciaio 4.8
Steel 4.8 grade

Zincato bianco
White zinc plated

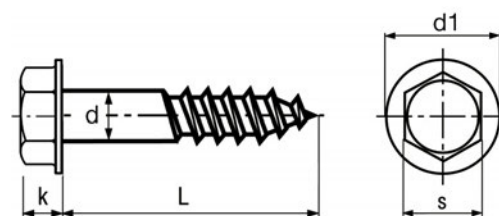

d	L	Passo	s	d1	k	Codice	
mm	mm	mm	mm	min	mm	Item code	pz
6,0	50,0	2,6	10,0	14,3	5,5	05063ZB	200
6,0	60,0	2,6	10,0	14,3	5,5	05064ZB	200
6,0	70,0	2,6	10,0	14,3	5,5	05065ZB	100
6,0	80,0	2,6	10,0	14,3	5,5	05066ZB	100
6,0	90,0	2,6	10,0	14,3	5,5	05067ZB	100
6,0	100,0	2,6	10,0	14,3	5,5	05068ZB	100
6,0	110,0	2,6	10,0	14,3	5,5	05069ZB	100
6,0	120,0	2,6	10,0	14,3	5,5	05070ZB	100
6,0	130,0	2,6	10,0	14,3	5,5	05071ZB	100
6,0	140,0	2,6	10,0	14,3	5,5	05072ZB	100
6,0	150,0	2,6	10,0	14,3	5,5	05073ZB	100
6,0	180,0	2,6	10,0	14,3	5,5	19128ZB	100
6,0	200,0	2,6	10,0	14,3	5,5	54091ZB	100

Truciolare testa svasata croce PZ


DIN 7505A

Pz countersunk head chipboard screw

CSP+

Acciaio C15
Carbon steel C15

Zincato bianco
White zinc plated

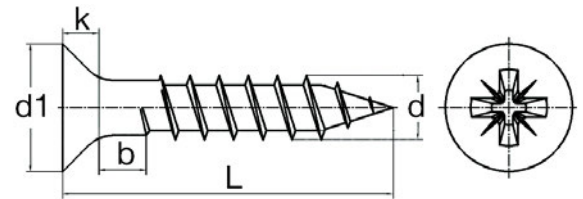

d	L	Passo	d1	k	r	PZ	Codice	
mm	mm	Thread	max	min	mm	mm	Item code	pz
2,5	12,0	1,2	5,00	1,22	1,50	1	08717ZB	1.000
3,0	16,0	1,5	5,80	1,60	1,50	1	08722ZB	1.000
3,0	20,0	1,5	5,80	1,60	1,50	1	08726ZB	1.000
3,0	25,0	1,5	5,80	1,60	1,50	1	08727ZB	500
3,5	16,0	1,8	6,70	1,76	1,80	2	08733ZB	1.000
3,5	20,0	1,8	6,70	1,76	1,80	2	08736ZB	1.000
3,5	25,0	1,8	6,70	1,76	1,80	2	08738ZB	500
3,5	30,0	1,8	6,70	1,76	1,80	2	08740ZB	500
3,5	40,0	1,8	6,70	1,76	1,80	2	08743ZB	500
3,5	50/40	1,8	6,70	1,76	1,80	2	08746ZB	200
3,5	60/40	1,8	6,70	1,76	1,80	2	46035ZB	200
4,0	16,0	2	7,70	2,05	2,00	2	08748ZB	500
4,0	18,0	2	7,70	2,05	2,00	2	08750ZB	500
4,0	20,0	2	7,70	2,05	2,00	2	08751ZB	500
4,0	25,0	2	7,70	2,05	2,00	2	08754ZB	500
4,0	30,0	2	7,70	2,05	2,00	2	08756ZB	500
4,0	35,0	2	7,70	2,05	2,00	2	08758ZB	500
4,0	40,0	2	7,70	2,05	2,00	2	33521ZB	500
4,0	50,0	2	7,70	2,05	2,00	2	08761ZB	200
4,0	60/50	2	7,70	2,05	2,00	2	32986ZB	200
4,5	20,0	2,2	8,50	2,46	2,20	2	08763ZB	500
4,5	25,0	2,2	8,50	2,46	2,20	2	08764ZB	500
4,5	30,0	2,2	8,50	2,46	2,20	2	08765ZB	500
4,5	35,0	2,2	8,50	2,46	2,20	2	08766ZB	200
4,5	40,0	2,2	8,50	2,46	2,20	2	08767ZB	200
4,5	45,0	2,2	8,50	2,46	2,20	2	08768ZB	200
4,5	50,0	2,2	8,50	2,46	2,20	2	08769ZB	200
4,5	60,0	2,2	8,50	2,46	2,20	2	08771ZB	200
4,5	70/60	2,2	8,50	2,46	2,20	2	08773ZB	200
4,5	80/60	2,2	8,50	2,46	2,20	2	24012ZB	200
5,0	30,0	2,6	9,50	2,99	2,50	2	08782ZB	200
5,0	35,0	2,6	9,50	2,99	2,50	2	08783ZB	200
5,0	40,0	2,6	9,50	2,99	2,50	2	08784ZB	200
5,0	45,0	2,6	9,50	2,99	2,50	2	08786ZB	200
5,0	50,0	2,6	9,50	2,99	2,50	2	08787ZB	200
5,0	60,0	2,6	9,50	2,99	2,50	2	08788ZB	200
5,0	70/60	2,6	9,50	2,99	2,50	2	08789ZB	200
5,0	80/60	2,6	9,50	2,99	2,50	2	08790ZB	200
5,0	90/60	2,6	9,50	2,99	2,50	2	08792ZB	100
5,0	100/60	2,6	9,50	2,99	2,50	2	08779ZB	100
5,0	120/60	2,6	9,50	2,99	2,50	2	32925ZB	100
6,0	40,0	3,1	11,40	3,20	2,50	3	08793ZB	200
6,0	50,0	3,1	11,40	3,20	2,50	3	08795ZB	200
6,0	60,0	3,1	11,40	3,20	2,50	3	08796ZB	200
6,0	70/60	3,1	11,40	3,20	2,50	3	08797ZB	200
6,0	80/60	3,1	11,40	3,20	2,50	3	08799ZB	200
6,0	100/60	3,1	11,40	3,20	2,50	3	08801ZB	100
6,0	120/60	3,1	11,40	3,20	2,50	3	10280ZB	100



Truciolare testa svasata croce PZ


DIN 7505A

CSP+

Pz countersunk head chipboard screw

Acciaio C15
Carbon steel C15

Zincato bianco
White zinc plated

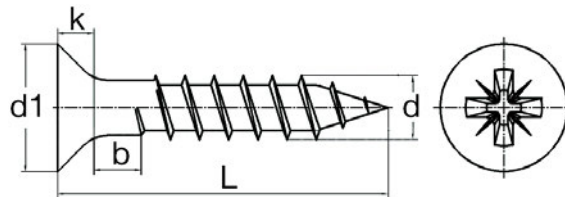

d	L	Passo	d1	k	r	PZ	Codice	
mm	mm	Thread	max	min	mm	mm	Item code	pz
6,0	140/60	3,1	11,40	3,20	2,50	3	23961ZB	100
6,0	150/60	3,1	11,40	3,20	2,50	3	23045ZB	200
6,0	160/60	3,1	11,40	3,20	2,50	3	23960ZB	100
6,0	180/60	3,1	11,40	3,20	2,50	3	23054ZB	100

Bronzato
Bronze plated

3,5	40,0	1,8	6,70	1,76	1,80	2	08743BR	500
4,0	30,0	2	7,70	2,05	2,00	2	08756BR	500
4,0	40,0	2	7,70	2,05	2,00	2	33521BR	500
4,0	50,0	2	7,70	2,05	2,00	2	08761BR	200
4,0	60/50	2	7,70	2,05	2,00	2	32986BR	200
4,5	20,0	2,2	8,50	2,46	2,20	2	08763BR	500
4,5	25,0	2,2	8,50	2,46	2,20	2	08764BR	500
4,5	30,0	2,2	8,50	2,46	2,20	2	08765BR	500
4,5	40,0	2,2	8,50	2,46	2,20	2	08767BR	200
4,5	45,0	2,2	8,50	2,46	2,20	2	08768BR	200
4,5	50,0	2,2	8,50	2,46	2,20	2	08769BR	200
4,5	60,0	2,2	8,50	2,46	2,20	2	08771BR	200
4,5	70/60	2,2	8,50	2,46	2,20	2	08773BR	200
4,5	80/60	2,2	8,50	2,46	2,20	2	24012BR	200
5,0	25,0	2,6	9,50	2,99	2,50	2	08781BR	500
5,0	30,0	2,6	9,50	2,99	2,50	2	08782BR	200
5,0	40,0	2,6	9,50	2,99	2,50	2	08784BR	200
5,0	50,0	2,6	9,50	2,99	2,50	2	08787BR	200
5,0	60,0	2,6	9,50	2,99	2,50	2	08788BR	200
5,0	70/60	2,6	9,50	2,99	2,50	2	08789BR	200
5,0	80/60	2,6	9,50	2,99	2,50	2	08790BR	200


Truciolare testa svasata croce PZ

DIN 7505A

Pz countersunk head chipboard screw

CSP+

Acciaio Inox AISI 304
Stainless steel AISI 304

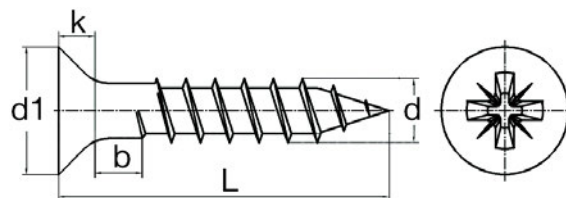

d	L	Passo	d1	k	r	PZ	Codice	
mm	mm	Thread	max	min	mm	mm	Item code	pz
4,0	20,0	2	7,70	2,05	2,00	2	1908400	500
4,0	25,0	2	7,70	2,05	2,00	2	1007800	500
4,0	30,0	2	7,70	2,05	2,00	2	1663700	500
4,0	35,0	2	7,70	2,05	2,00	2	1834800	500
4,0	40,0	2	7,70	2,05	2,00	2	1523300	500
4,0	50,0	2	7,70	2,05	2,00	2	0237800	500
4,5	25,0	2,2	8,50	2,46	2,20	2	1829300	500
4,5	30,0	2,2	8,50	2,46	2,20	2	3024300	500
4,5	35,0	2,2	8,50	2,46	2,20	2	1834900	500
4,5	40,0	2,2	8,50	2,46	2,20	2	3024500	200
4,5	45,0	2,2	8,50	2,46	2,20	2	1116200	200
4,5	50,0	2,2	8,50	2,46	2,20	2	1835000	200
4,5	60,0	2,2	8,50	2,46	2,20	2	1910100	200
5,0	20,0	2,6	9,50	2,99	2,50	2	1908500	500
5,0	25,0	2,6	9,50	2,99	2,50	2	2249900	500
5,0	30,0	2,6	9,50	2,99	2,50	2	1887400	500
5,0	35,0	2,6	9,50	2,99	2,50	2	1686000	500
5,0	40,0	2,6	9,50	2,99	2,50	2	1887500	200
5,0	50,0	2,6	9,50	2,99	2,50	2	2397400	200
5,0	60,0	2,6	9,50	2,99	2,50	2	1787700	200
6,0	50,0	3,1	11,40	3,20	2,50	3	2668800	100
6,0	60,0	3,1	11,40	3,20	2,50	3	1882600	200
6,0	70,0	3,1	11,40	3,20	2,50	3	2544300	100
6,0	80,0	3,1	11,40	3,20	2,50	3	0066600	100